


# Manuale dell'utente del MultiTransmitter

aggiornato 8 luglio 2020

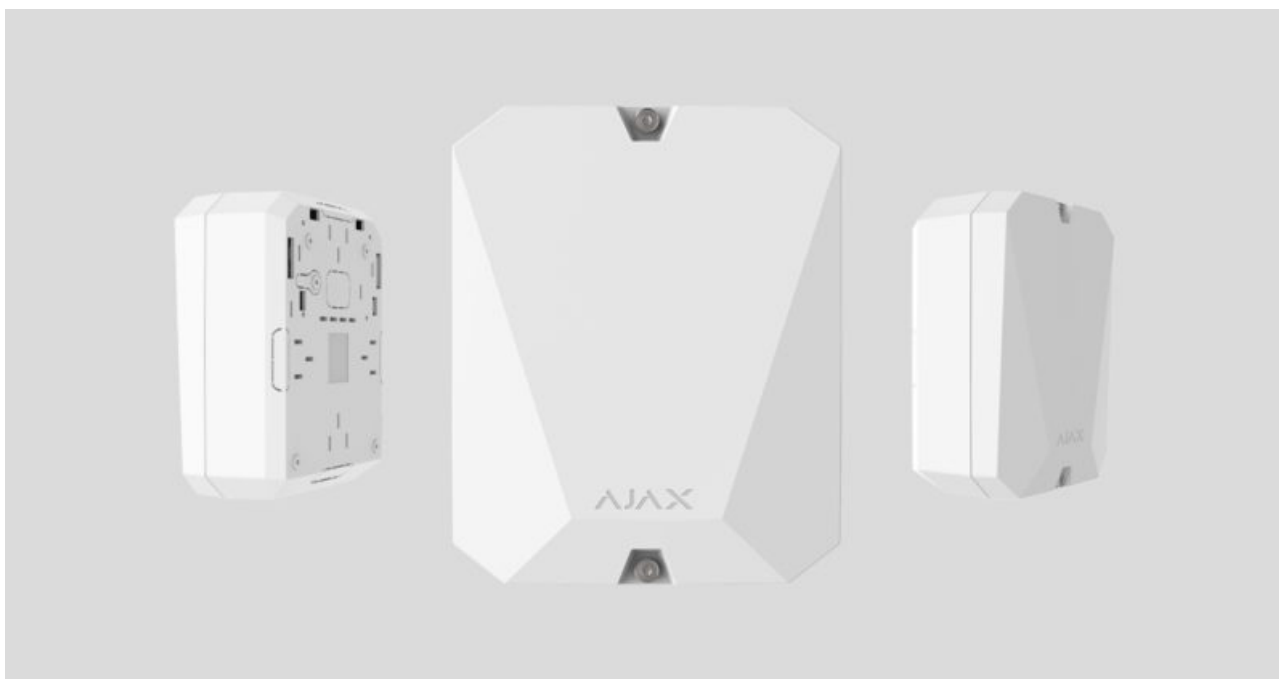

**MultiTransmitter** è un modulo di integrazione con 18 zone cablate per il collegamento di rilevatori di terze parti al sistema di sicurezza Ajax. Per proteggere dallo smantellamento, MultiTransmitter è dotato di due tamponi. È alimentato dalla rete da 100–240 V CA e può funzionare anche con una batteria di backup da 12 V. Può fornire alimentazione a 12 V ai rivelatori collegati.

MultiTransmitter funziona come parte del sistema di sicurezza Ajax collegandosi all'hub tramite il protocollo di comunicazione radio sicura [Jeweler](#). Il raggio di comunicazione dell'hub è fino a 2.000 metri, a condizione che non vi siano ostacoli. Se vengono rilevati inceppamenti o interferenze, l'evento "**alto livello di interferenze alle frequenze del gioielliere**" viene trasmesso alla stazione di monitoraggio centrale della società di sicurezza e agli utenti del sistema.

[Cos'è l'ostruzione di un sistema di sicurezza](#)




Non compatibile con [ocBridge Plus](#), [uartBridge](#) e unità centrali di sicurezza di terze parti

Il dispositivo si connette all'hub ed è configurato tramite le [app Ajax](#) su iOS, Android, macOS e Windows. Tutti gli allarmi e gli eventi dell'utente sono segnalati da notifiche push, SMS e chiamate se abilitati. Il sistema di sicurezza Ajax può essere collegato alla stazione di monitoraggio centrale della società di sicurezza. L'elenco dei partner autorizzati è disponibile [qui](#).

Acquista il modulo di integrazione MultiTransmitter

## Elementi funzionali

## Elementi del corpo

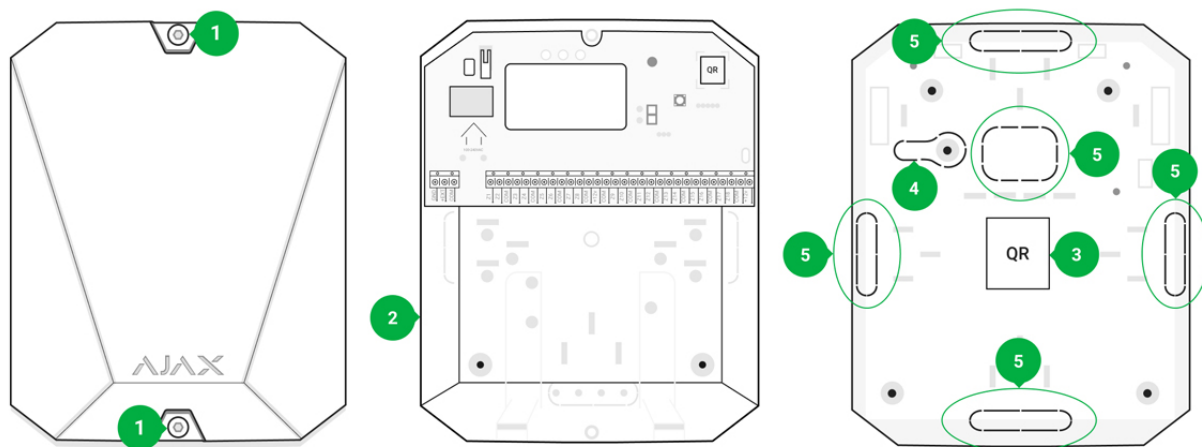

1. Viti che fissano il coperchio del corpo. Svitare con chiave esagonale in dotazione ( $\varnothing$  4 mm)

2. Cavità per batteria tampone




Batteria non inclusa con il set MultiTransmitter

3. Codice QR e ID / numero di serie del dispositivo

4. Parte perforata del corpo. È necessario per la manomissione in caso di tentativi di smontaggio

5. Parte perforata del corpo per l'uscita dei fili di rilevatori e dispositivi collegati

## Elementi della scheda MultiTransmitter

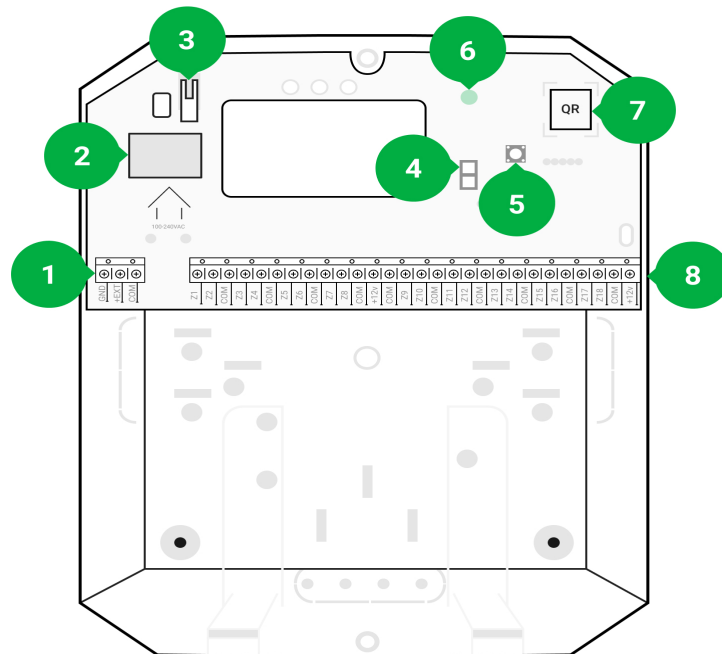

1. Terminali di alimentazione per rivelatori d'incendio

2. Ingresso alimentazione 110/230 V

3. Pulsante antimanomissione. Segnala se il coperchio del corpo del MultiTransmitter è stato rimosso

4. Terminali per il collegamento di una batteria di backup da 12 V.


5. Pulsante di alimentazione

6. Indicatore LED

7. Codice QR e ID / numero di serie del dispositivo

8. Terminali per il collegamento di rivelatori cablati (zone)

## Terminali MultiTransmitter

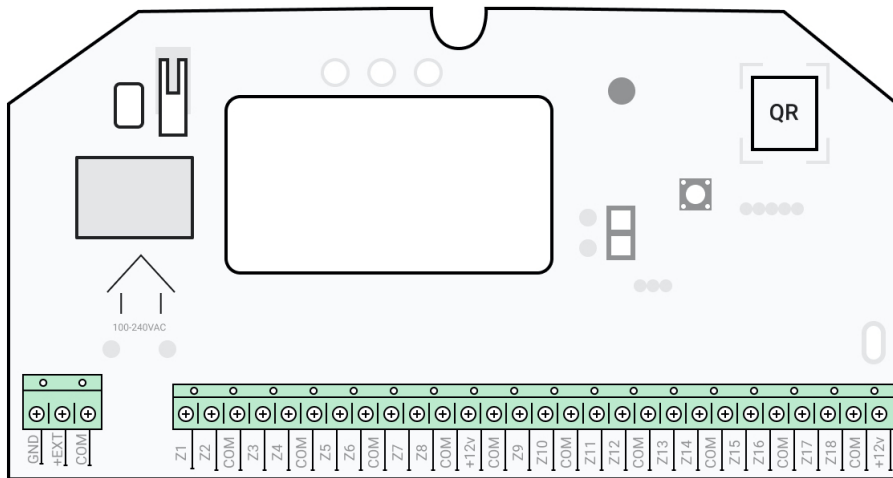

## Terminali di sinistra:

**GND** - MultiTransmitter common ground

**+ EXT** - Uscita alimentazione 12 V per rivelatori di incendio

**COM** - input comune per il collegamento di circuiti di alimentazione e contatti di segnale di rilevatori cablati


## Terminali di destra:

**Z1 – Z18** - ingresso per rivelatore cablato connessione

**+12 V** - 12 V uscita di alimentazione per rivelatori cablati

**COM** - ingresso comune per il collegamento di circuiti di alimentazione e contatti di segnale di rivelatori cablati

## Indicazione LED

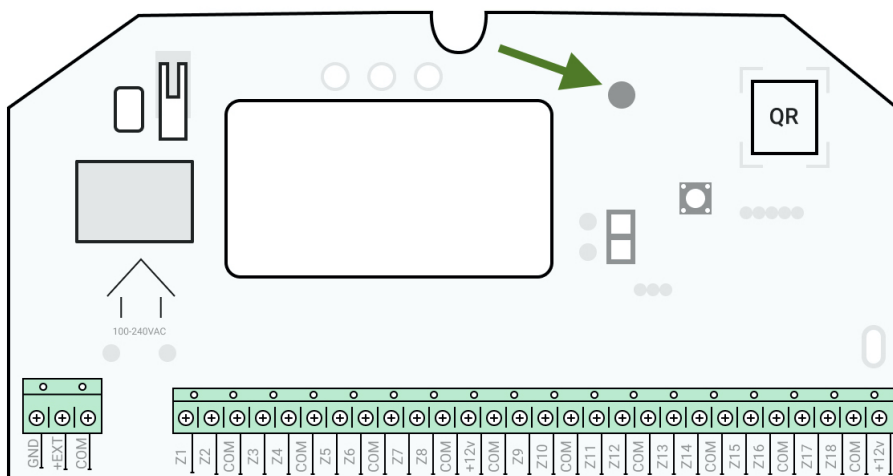

L'indicatore LED del MultiTransmitter potrebbe illuminarsi di bianco, rosso o verde, a seconda dello stato del dispositivo. Si noti che l'indicatore LED non è visibile quando il coperchio del corpo è chiuso, ma lo stato del dispositivo può essere trovato nell'app Ajax.


Indicazione LED	Evento	Nota
Luci bianche	Viene stabilita la connessione con l'hub, l'alimentazione esterna è collegata	
Luci rosse	Non è presente alcuna connessione con l'hub, l'alimentazione esterna è collegata	Ad esempio, l'hub è spento o MultiTransmitter è al di fuori dell'area di copertura della rete wireless dell'hub
Lampeggia in rosso una volta al secondo	MultiTransmitter is not assigned to the hub	
Lights up for a second once every 10 seconds	No external power supply is connected to MultiTransmitter	Lights up white if there is connection with hub. Lights up red if there is no hub connection
During an alarm, gradually lights up and goes out once every 10 seconds	No external power supply and discharged external battery of MultiTransmitter	Lights up white if there is connection with hub. Lights up red if there is no hub connection



If MultiTransmitter is not assigned to the hub or has lost connection with it, the integration module will not give an indication of the battery status or the presence of external power supply.



## Operating principle

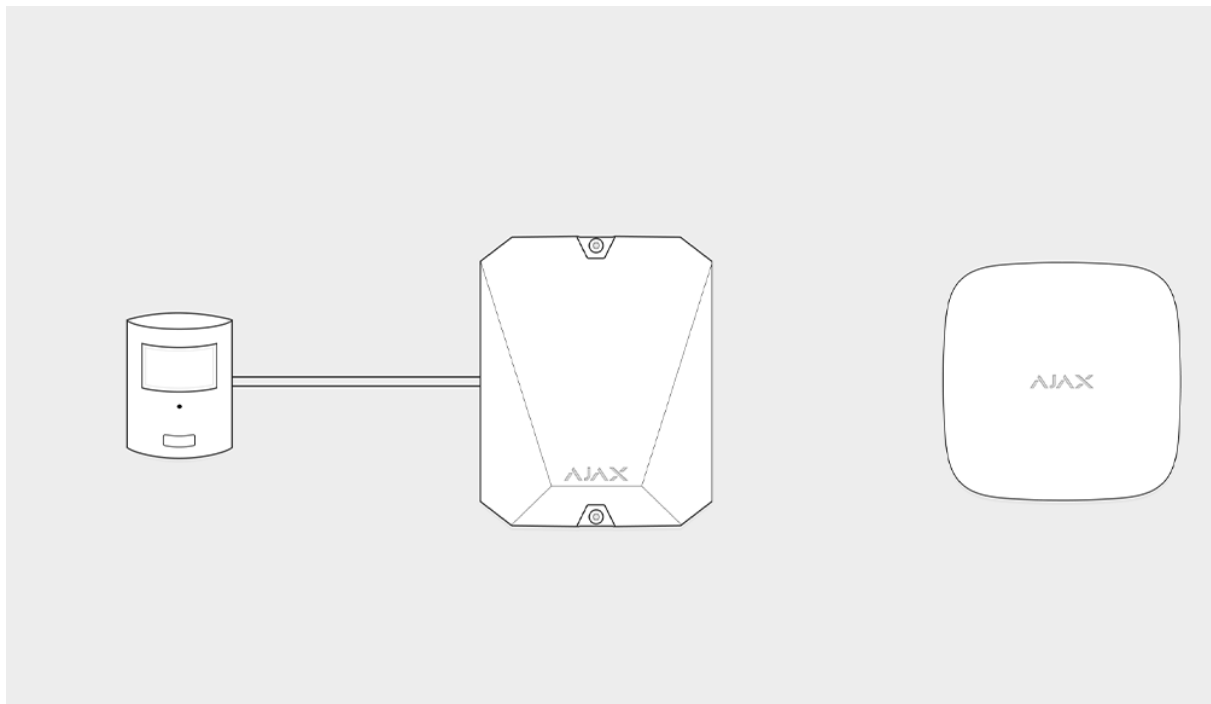



MultiTransmitter is designed for connecting third-party wired detectors and devices to the Ajax security system. The integration module receives information about alarms and triggering of detector tampers via wires connected to the terminals.



MultiTransmitter can be used to connect panic and medical alarm buttons, indoor and outdoor motion detectors, as well as detectors tracking opening, vibration, breaking, fire, gas, leakage, etc. The type of device is indicated in the zone settings. The text of notifications about alarms and events of the connected device, as well as event codes transmitted to the Central Monitoring Station (CMS) of the security company depend on the selected device type.

**A total of 6 types of devices are available:**

Type	Icon
Tamper	
Intrusion alarm	
Fire alarm	

	
Medical alarm	
Panic button	
Gas concentration alarm	

MultiTransmitter has 18 wired zones. The number of connected devices depends on their power consumption. The total maximum current consumption of all connected devices or detectors is 1 A.

**Supported connection types:**

Designation	Type
NO	Normally open
NC	Normally closed. Without resistors
EOL (NC with resistors)	Normally closed. With resistors
EOL (NO with resistors)	Normally open. With resistors

The integration module has 3 power supply lines of 12 V: one dedicated line for fire detectors and two – for other devices.



After the fire alarm, fire detectors need a power reset to restore normal operation. Therefore, the fire detectors power supply should only be connected to a dedicated line. Also, avoid connecting other detectors and devices to power terminals of fire detectors as this may lead to false alarms or incorrect operation of the devices.

## Event transmission to the monitoring station

Ajax security system can connect to the CMS and transmit alarms to the monitoring station in Sur-Gard (ContactID) and SIA protocol formats.

The loop (zone) number of the integration module and the devices connected to it can be found in Ajax apps, in the **Groups** menu of the hub settings.

To learn the loop (zone) number, select the group in which the integration module is located or the desired connected device. The **Device Number** (or **DeviceIndex** in [Ajax PRO Desktop](#)) corresponds to the loop (zone) number.

## Connecting to the hub

For the Ajax security system, MultiTransmitter acts as a single device and each connected device or detector occupies a single slot in the limited number of the hub devices – 100 in [Hub](#) and [Hub 2](#), 150 in [Hub Plus](#), and 200 in [Hub 2 Plus](#).



Wired detectors can be connected to MultiTransmitter both before and after connecting the module to the hub.

## Before starting connection

1. Install the [Ajax app](#). [Create an account](#). Add a hub to the app and create at least one room.




2. Check that the hub is on and has access to the internet (via Ethernet cable, Wi-Fi, and/or mobile network). You can do this in the Ajax app or by looking at the hub logo on the front panel. The logo should light up white or green if the hub is connected to the network.
3. Ensure that the hub **is disarmed** and **does not start updates** by checking its status in the app.



Only users with administrator rights can add MultiTransmitter to the hub.

## In order to connect MultiTransmitter

1. Go to the **Devices** tab  in the Ajax app and click **Add Device**.
2. Name the integration module, scan or enter the QR code manually (located on the body and packaging), and select the placement room.
3. Click **Add**; the countdown will begin.
4. Turn on MultiTransmitter by holding the power button for 3 seconds. Keep in mind that the request to connect to the hub is transmitted only when the integration module is turning on.



For the detection and pairing to occur, the integration module should be located within the coverage area of the hub's wireless network (at the same guarded object).


If the connection has failed, disconnect MultiTransmitter for 5 seconds and try again.


If the integration module has already been assigned to another hub, turn off the integration module, and then follow the standard addition procedure.






The connected integration module will appear in the app, in the hub's list of devices. Updating device statuses in the list depends on the ping time defined in Jeweller settings. The default value is 36 seconds.

# MultiTransmitter states
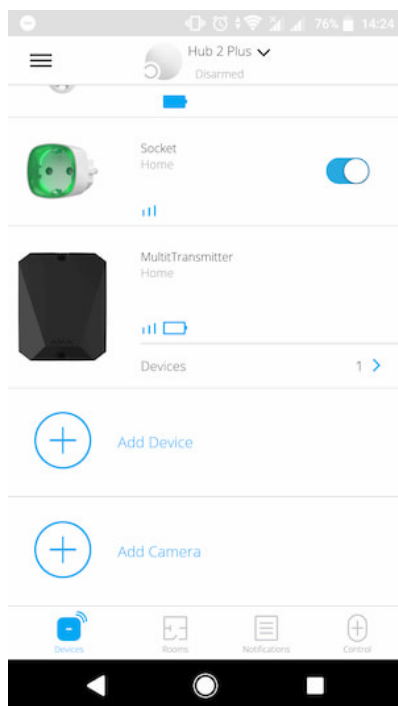
## Icons

Icons display some of the MultiTransmitter states. You can view them in the Ajax app, in the **Devices** tab .





Icon	Value
	Jeweller signal strength – displays the signal strength between the hub and MultiTransmitter
	A fire detector connected to MultiTransmitter has registered an alarm
	MultiTransmitter battery charge level
	MultiTransmitter has a malfunction. The list is available in the integration module states
	MultiTransmitter works through a ReX radio signal range extender


## States

States can be found in the [Ajax app](#):

1. Go to the **Devices** tab .

2. Select MultiTransmitter from the list.

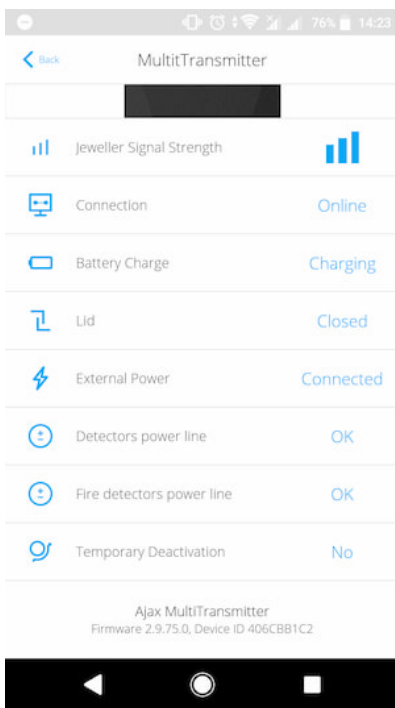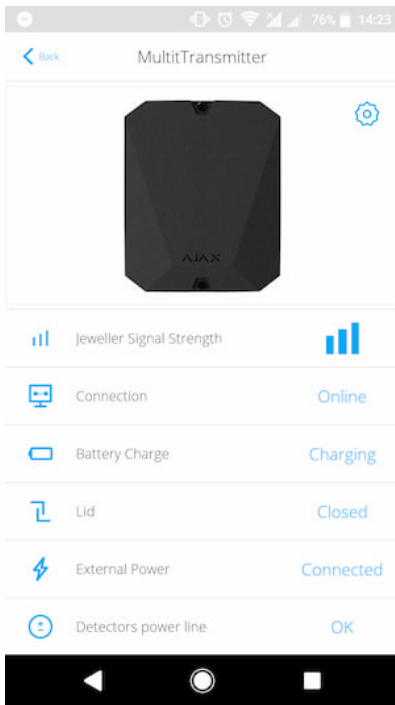



Parameter	Value
Malfunction	Click  to open the list of MultiTransmitter malfunctions  The field is displayed only if a malfunction is detected.

Jeweller signal strength	Signal strength between the hub and MultiTransmitter
Connection	Connection status between the hub and MultiTransmitter
Battery charge	MultiTransmitter battery charge level. Displayed in increments of 5%
Lid	The status of tampers that respond to detachment or violation of the integrity of the body  <b><u>What is a tamper</u></b>
External power	The presence of external power supply 110/230 V
ReX "range extender name"	The ReX range extender connection status.  Displayed if MultiTransmitter is working via a <b><u>ReX radio signal range extender</u></b>
Detector power line	Status of detector power terminals: <ul style="list-style-type: none"> <li>• <b>OK</b> – terminals in normal condition</li> <li>• <b>Shorted</b> – terminals are shorted</li> </ul>
Fire detector power line	Status of power supply terminals of fire detectors: <ul style="list-style-type: none"> <li>• <b>OK</b> – terminals in normal condition</li> <li>• <b>Shorted</b> – terminals are shorted</li> </ul>
Firmware	MultiTransmitter firmware version. It is not possible to change the firmware
ID	ID/serial number of MultiTransmitter. Also located on the device box and on the integration module body


## MultiTransmitter settings

Settings can be changed in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter from the list.
3. Go to **Settings** by clicking on the  icon.



Note that after changing the settings, you should click the **Back** button to save them.

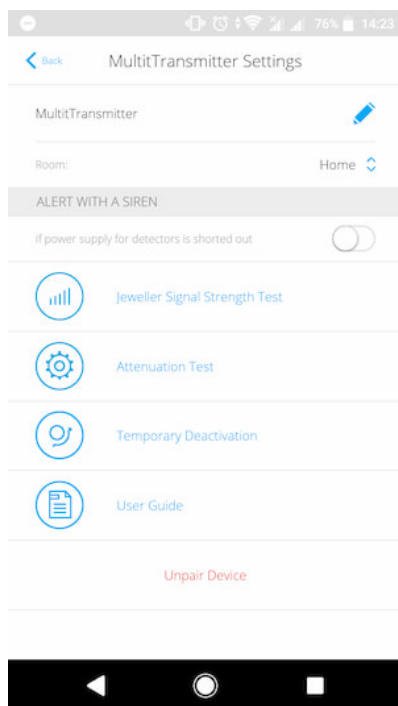


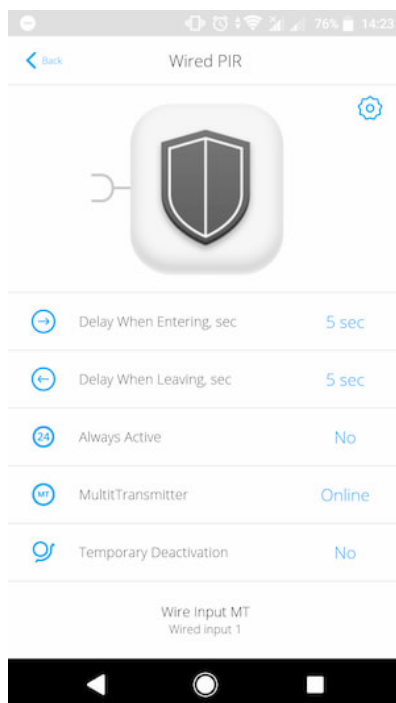
Setting	Value
First field	Integration module name that can be edited. The name of the device is displayed in the text of SMS and notifications in the event feed.  The name can contain up to 12 Cyrillic characters or up to 24 Latin symbols
Room	Selecting the virtual room to which MultiTransmitter is assigned. The room name is displayed in the text of SMS and notifications in the event feed
Alert with a siren, if power supply for detectors is shorted out	When enabled, sirens connected to the security system signal if detectors power line is shorted out
Jeweller Signal Strength Test	Switches the integration module to the Jeweller

	<p>signal strength test mode. The test allows you to check the signal strength between the hub and MultiTransmitter and determine the optimal installation location</p> <p><b><u>What is Jeweller Signal Strength Test</u></b></p>
Attenuation Test	<p>Switches MultiTransmitter to the signal attenuation test mode</p> <p><b><u>What is signal attenuation test</u></b></p>
User Guide	Opens MultiTransmitter User Guide
Unpair device	Unpairs MultiTransmitter, disconnects it from the hub, and deletes its settings

## States of connected detectors and devices

You can find the states of connected wired detectors and devices in the [Ajax app](#):

1. Go to the **Devices** tab .
2. Select MultiTransmitter in the device list.
3. Click on **Devices**.
4. Select the device from the list.





Parameter	Value
Malfunction	<p>Click <a href="#">i</a> to open the malfunctions list of the connected wired detector.</p> <p>The field is displayed only if a malfunction is detected</p>
Delay when entering, sec	<p>Delay time when entering in seconds. Delay when entering (alarm activation delay) is the time you have to disarm the security system after entering the premises</p> <p><a href="#"><u>What is Delay When Entering</u></a></p>
Delay when leaving, sec	<p>Delay time when leaving in seconds. Delay when leaving (alarm activation delay) is the time you have to exit the premises after the security system is armed</p> <p><a href="#"><u>What is Delay When Leaving</u></a></p>
Detector status	<p>The status of the connected wired detector:</p> <ul style="list-style-type: none"> <li>• <b>OK</b> – the connected detector is normal</li> <li>• <b>Alarm</b> – the connected detector has detected an alarm</li> <li>• <b>Shorted</b> – the terminals to which the detector is connected are shorted. Status is only available in case of an EOL NC connection</li> <li>• <b>Break</b> – is displayed if the connected detector is disconnected. Status is only available in case of an EOL NO connection</li> </ul>
Always active	<p>When enabled, the detector is always in armed mode</p>
MultiTransmitter	<p>Status and name of the MultiTransmitter to which the wired detector is connected:</p> <ul style="list-style-type: none"> <li>• <b>Connected</b> – MultiTransmitter is connected to the hub</li> <li>• <b>No connection</b> – MultiTransmitter has no connection with the hub</li> </ul>

Device #	The number of MultiTransmitter zone to which the detector is connected
----------	--


## Settings of connected wired detectors and devices

Settings can be changed in the [Ajax app](#):


1. Go to the **Devices** tab .
2. Select MultiTransmitter in the device list.
3. Click on **Devices**.
4. Select the desired device from the list.
5. Go to **Settings** by clicking on the .



Note that after changing the settings, you should click the **Back** button to save them.

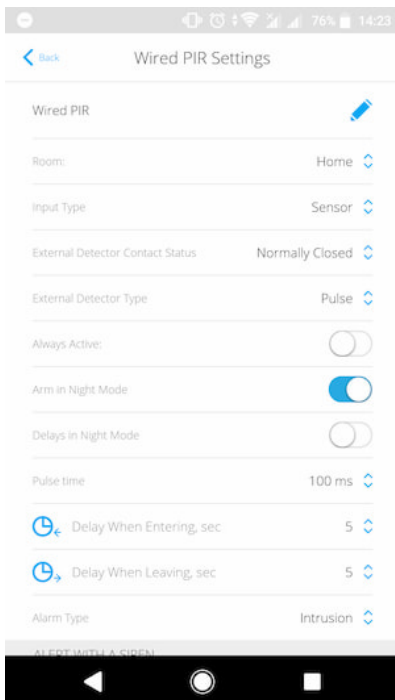



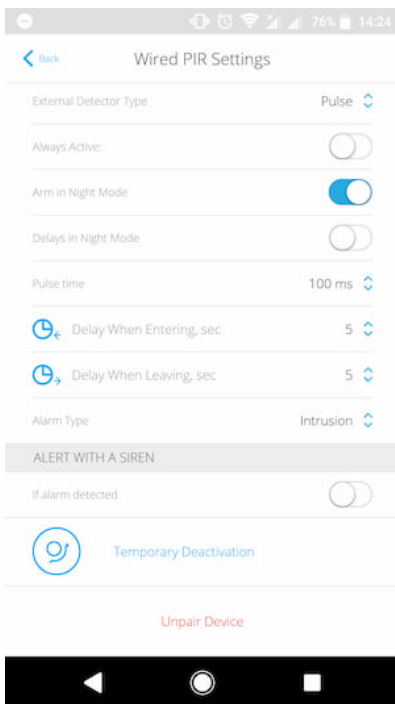

Setting	Value
First field	<p>The name of the detector or device that can be changed. The name is displayed in the text of SMS and notifications in the event feed.</p> <p>The name can contain up to 12 Cyrillic characters or up to 24 Latin symbols</p>
Room	<p>Selecting the virtual room to which a detector or device is assigned. The room name is displayed in the text of SMS and notifications in the event feed</p>
Device Type	<p>Selecting the connected device type:</p> <ul style="list-style-type: none"> <li>• <b>Tamper</b></li> <li>• <b>Sensor</b></li> </ul>
External Detector Contact Status	<p>Selecting the normal contact state of the connected detector or device:</p> <ul style="list-style-type: none"> <li>• <b>NC</b></li> <li>• <b>NO</b></li> <li>• <b>EOL (NC with R)</b></li> <li>• <b>EOL (NO with R)</b></li> </ul>

<p>External detector type</p>	<p>Type of connected detector or device:</p> <ul style="list-style-type: none"> <li>• <b>Pulse</b> – e. g., a motion detector. After an alarm, a recovery event is not sent if the detector returns to the normal state</li> <li>• <b>Bistable</b> – e. g., an opening detector. After an alarm, a recovery event is also sent when the detector returns to the normal state</li> </ul> <p>Set the type that matches the connected detector. The pulsed detector in the bistable mode generates unnecessary recovery events. A bistable detector in pulsed mode, on the contrary, will not send recovery events</p>
<p>Always active</p>	<p>The detector constantly registers alarms in the <b>Always active</b> mode. Regardless of whether the system is in the armed mode, the detector will notify you of every triggering. The mode should be enabled if the detector is installed in a room that requires constant monitoring</p>
<p>Delay when entering, sec</p>	<p>Selecting the delay time when entering. Delay when entering (alarm activation delay) is the time you have to disarm the security system after entering the premises.</p> <p>You can set a value from 0 to 120 seconds</p> <p><b><u>What is Delay When Entering</u></b></p>
<p>Delay when leaving, sec</p>	<p>Selecting the delay time when leaving. Delay when leaving (alarm activation delay) is the time you have to exit the premises after the security system is armed.</p> <p>You can set a value from 0 to 120 seconds</p> <p><b><u>What is Delay When Leaving</u></b></p>
<p>Arm in Night mode</p>	<p>If active, the device will switch to armed mode when using night mode</p>

	<u>What is Night Mode</u>
Delays in Night mode	Delay turned on when using night mode
Pulse time	<p>Pulse time of a detector or device for detecting an alarm:</p> <ul style="list-style-type: none"> <li>• 20 ms</li> <li>• 100 ms</li> <li>• 1 s</li> </ul> <p>An alarm is raised if the pulse from the detector is longer than the specified value in this setting. It can be used as a bounce filter</p>
Resistance	<p>The resistance of the resistor connected to the detector. Can be set from 1 kΩ to 7.5 kΩ in increments of 100 ohms.</p> <p>MultiTransmitter automatically measures the resistance of the connected resistor and displays it in this field as the recommended value</p>
Alarm type	<p>Selecting the detector alarm type:</p> <ul style="list-style-type: none"> <li>• Intrusion</li> <li>• Fire</li> <li>• Medical help</li> <li>• Panic button</li> <li>• Gas</li> </ul> <p>The text of SMS and notifications in the event feed depends on the selected type of alarm</p>
Alert with a siren if alarm is detected	When enabled, <u>sirens</u> connected to the security system signal about the alarm of the detector or device
Unpair device	Deletes wired detector or device settings

# Connecting wired detectors and devices to MultiTransmitter

## How to connect a wired detector or device




When connecting third-party detectors and devices, do not twist the wires together, but solder them. The ends of wires of the devices or detectors, which will be inserted into the integration module terminals should be tinned or crimped with a special sleeve.

1. Select the MultiTransmitter zone to which you would like to connect a detector or device.
2. Route the wires of the detector or device into the integration module body.
3. Connect a wired detector or device to the appropriate MultiTransmitter terminals. The wiring diagram can be found in the User Guide provided by the manufacturer of the wired detector or device.
4. Securely fasten the cable to the terminals.



If the detector or device requires 12 V power supply for operation, it can be connected to the power terminals of the corresponding MultiTransmitter zone. Separate terminals are provided for fire detectors. Do not connect the external power supply to the detector power terminals, as this may damage the device.



## How to add a wired detector or device

1. In the Ajax app, go to the **Devices** tab .
2. Select MultiTransmitter in the device list.
3. Click on **Devices**.
4. Click **Add Wired Device**.
5. Name the device or detector, select the wired zone to which the device or detector is connected, and select a placement room and a group.

6. Click **Add**. The device or detector will be then added within 30 seconds. If for some reason this does not happen, try again. If you encounter connection problems, contact [Support Service](#).

## MultiTransmitter functionality test

Integration module functionality tests do not begin immediately, but not later than over a single ping period of the hub detector (36 seconds with the standard settings of the hub). You can change the ping period of devices in the **Jeweller** menu of the hub settings.

Tests are available in the device settings menu (**Ajax app** > **Devices**  > **MultiTransmitter** > **Settings** ):

- [Jeweller Signal Strength Test](#)
- [Attenuation Test](#)

## Selecting MultiTransmitter placement

The placement of the integration module determines its distance from the hub and the presence of obstacles between them that impede the passage of the radio signal: walls, inter-floor constructions, or large-sized objects located in the room.



Be sure to check the signal strength at the installation site. If the signal strength is low (a single bar), we cannot guarantee a stable operation of the security system! At the very least, relocate the device as repositioning even by 20 cm can significantly improve the signal reception.

If poor or unstable signal strength is still reported after the relocation of the device, use the [ReX radio signal range extender](#) of the security system.

When choosing the installation location, consider the distance between the integration module and wired devices or detectors – the cable length should be sufficient for connection. The maximum length of the signal cable for connecting a device or a detector is 400 meters (cable material is copper-plated

aluminum, cross-section is 0.22 mm<sup>2</sup>). The value may vary if a different type of cable is used. No tests were conducted on other types of cables.

## MultiTransmitter installation



Prior to mounting the integration module, ensure that you have selected the optimal location and that it corresponds to this manual!

The body allows mounting the integration module on a vertical surface.

### In order to install a module:

1. Secure the body to the surface with bundled screws using at least two fixing points. In order for the integration module tamper to respond to a dismantling attempt, be sure to fix the body at the point with the perforated section.
2. Install the MultiTransmitter card into the body on the racks.
3. If available, connect a backup battery. Don't connect external power supply!



We recommend using a 12 V battery with a capacity of 4 or 7 A·h. For such batteries, special racks in the body are designed. You can also use similar batteries of a different capacity, of matching size, with the maximum full charge time of no more than 30 hours. The maximum battery size for installation in the body is 150 × 64 × 94 mm.

4. Connect wired detectors and devices to the integration module. Turn on the integration module.
5. Install the lid on the body and secure it with the bundled screws.



After installation, be sure to check the MultiTransmitter tamper status in the Ajax app.

## Do not install the integration module:

- Outdoors.
- Near metal objects and mirrors causing radio signal attenuation or screening.
- Inside premises with temperature and humidity outside the permissible limits.
- At a distance of less than 1 meter from the hub.

## Maintenance

Check the functionality of the integration module regularly. Clean the body from dust, cobwebs, and other contaminants as they emerge. Use a soft dry cloth that is suitable for equipment care. Do not use any substances containing alcohol, acetone, gasoline, and other active solvents to clean the device.

## Malfunction notifications

MultiTransmitter can report malfunctions to the central monitoring station of the security company, as well as to users through push notifications and SMS.

Notification	Value	Action
Contact is shorted out, <b>[device name]</b> in <b>[room name]</b>	MultiTransmitter terminals for connecting the wired device are shorted.  Notification can only be received if an EOL NC connection is used	Check the connection of the wired device or detector for short circuit.  After the normal state of the terminals is resumed, you will receive respective notification
Lost contact, <b>[device name]</b> in <b>[room name]</b>	The connected wired detector is torn off.  Notification can be obtained if an EOL NO connection is used	Check the connection of the wired device or detector to the integration module
External power has been	MultiTransmitter does not	Check for external power

disconnected, <b>[device name]</b> in <b>[room name]</b>	have a 100–240 V power supply	supply on the integration module
Battery has been disconnected, <b>[device name]</b> in <b>[room name]</b>	The backup battery is disconnected from MultiTransmitter	Check the connection of the backup battery to the integration module
Power supply terminal for detectors is shorted out, <b>[device name]</b> in <b>[room name]</b>	One of the two MultiTransmitter power supply outputs is shorted	Check the power supply connection of wired devices or detectors for short circuit.  After the normal state of the terminals is resumed, you will receive respective notification
Fire detector power supply terminal is shorted out, <b>[device name]</b> in <b>[room name]</b>	MultiTransmitter fire detector power supply output is shorted	Check the power supply connection of the wired fire detector for short circuit.  After the normal state of the terminals is resumed, you will receive respective notification
Battery is charging too long  <i>Displayed in integration module statuses</i>	MultiTransmitter battery charges for over 40 hours	The battery is most likely defective. Install another backup battery

## Fire alarms reset

In case of alarms of the fire detectors connected to MultiTransmitter, the window prompting of the need to reset the alarms is displayed in the Ajax app. This will make the detectors return to their normal state and continue to respond to a fire.



If the detectors are not reset after the fire alarm, they will not respond to the next fire, as they will remain in alarm mode.

**There are two ways to reset fire detectors:**



1. By clicking the button in the notification in the app.
2. Via MultiTransmitter menu: click on the red button opposite the integration module.

## Technical specifications

Number of alarm/tamper zones	18
Supported detector contact types	NO, NC (without R), EOL (NC with R), EOL (NO with R)
Resistance of the EOL Resistor	From 1 kΩ to 7.5 kΩ
Alarm signals processing mode	Pulsed or bistable
Main power supply	110–255 V, 50/60 Hz
Backup power	12 V DC
Supported battery type	12 V battery with a full charge cycle of up to 30 hours. The maximum battery size for installation in the body is 150 × 64 × 94 mm
Recommended battery type	12V battery with a capacity of 4 or 7 A·h
Detector power supply	12 V DC, up to 1 A total for all detector power supply outputs
Protection against dismantling	Tamper
Radio signal frequency band	868.0–868.6 MHz or 868.7–869.2 MHz, depending on the sales region
Compatibility	Operates with <a href="#">Hub</a> , <a href="#">Hub Plus</a> , <a href="#">Hub 2</a> , <a href="#">Hub 2 Plus</a> , and <a href="#">ReX</a>
Maximum RF output power	Up to 7.29 mW (25 mW limit)
Radio signal range	Up to 2,000 m (any obstacles absent)
Operating temperature range	From -10°C to +40°C
Operating humidity	Up to 75%
Dimensions	196 × 238 × 100 mm
Weight	805 g

# Complete Set

1. MultiTransmitter
2. Power cable
3. 12 V battery connection cable
4. Installation kit
5. Body
6. Quick Start Guide

## Warranty

The warranty for the “AJAX SYSTEMS MANUFACTURING” Limited Liability Company products is valid for 2 years after the purchase.

If the device does not work correctly, you should first contact the support service. In half of the cases, technical issues can be solved remotely!

[Warranty obligations](#)

[User agreement](#)

Technical support: [support@ajax.systems](mailto:support@ajax.systems)



## Need help?

In this section you'll find detailed manuals and educational videos about all features of Ajax. And in case you need help of a technical specialist, we're available 24/7.

[Send request](#)