

# ManualCallPoint Jeweller

Wireless resettable button featuring programmable scenarios



## Versions:



ManualCallPoint (Green)  
Jeweller



ManualCallPoint (Yellow)  
Jeweller



ManualCallPoint (White)  
Jeweller




ManualCallPoint (Blue)  
Jeweller



## Operating principle

In an emergency, ManualCallPoint Jeweller enables users to activate an alarm and run pre-programmed automation scenarios with a simple press. The button not only triggers alarms and security sirens but also can open electric locks, cut power to devices, and activate ventilation. Addressability ensures accurate tracking of button activations, specifying the time and room. Notifications are promptly sent to system users and CMS. Designed for emergencies, ManualCallPoint Jeweller prioritizes reliability. The button can be reset only using a special tool (key) included in the kit.

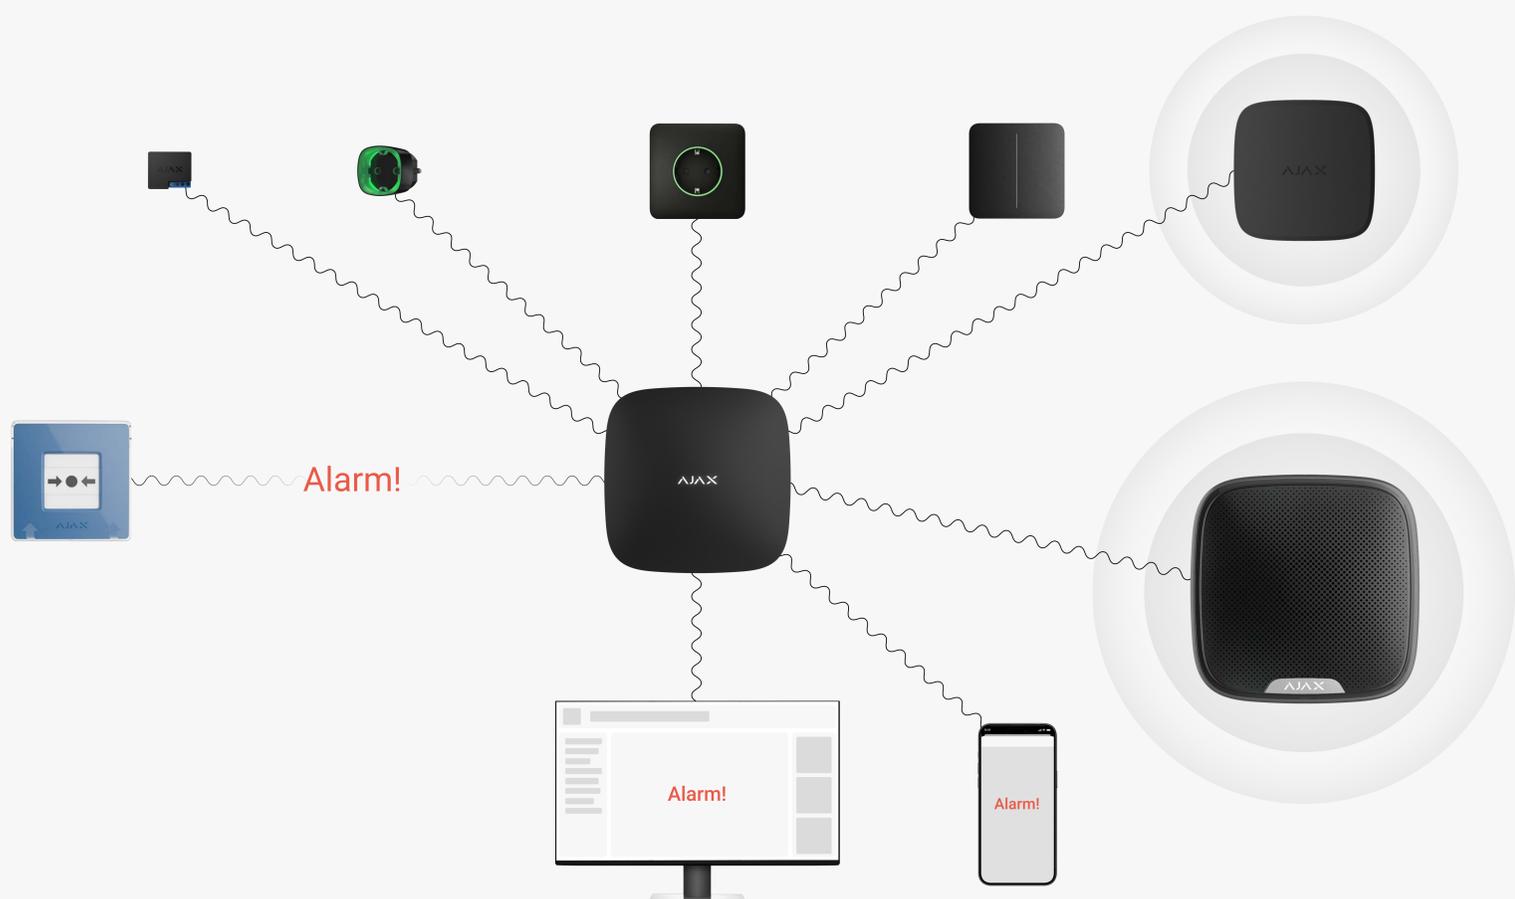



## Flexibility at the core

- Alarm types: fire alarm, auxiliary alarm, panic button, gas leak alarm, malfunction alert, water leak alarm
- In-app configuration of programmable actions
- Visual alarm verification using MotionCam detectors or any video camera connected to Ajax NVR
- Alarm delivery to CMS



## Flawless hardware

- Simplified button mechanism reduces the risk of failure
- Up to 7 years of autonomous operation with pre-installed batteries
- Transparent protective lid prevents accidental alarm activation
- Tamper alarm



## Smart and complex ecosystem

- Instant critical alerts and maintenance notifications
- Regular polling of the device to display current statuses in apps
- Automatic self-diagnosis with state reporting to the hub
- Up to 1,700 m (5,577 ft) of wireless communication and twice as much with a range extender



## Quick installation and setup

- SmartBracket panel to mount the device: no need to disassemble the enclosure
- Lock to secure the device on SmartBracket
- Special tool (key) to reset the button after alarm
- Pairing with a hub via QR code
- Remote control and configuration in the app

In an Ajax system, you can combine devices of all product categories: **Intrusion protection** (both Superior and Baseline), **Video surveillance**, **Fire and life safety**, or **Comfort and automation**. Create the system to suit your needs and manage it in a single interface.

Compatibility with hubs and range extenders	Communication with hub	Power supply	Enclosure	Complete set
 <p>For detailed information, scan the QR code or follow the link:</p> <p><a href="https://ajax.systems/tools/devices-compatibility/?models=MCP.G.J%2CMCP.Y.J%2CMCP.W.J%2CMCP.B.J">ajax.systems/tools/devices-compatibility/?models=MCP.G.J%2CMCP.Y.J%2CMCP.W.J%2CMCP.B.J</a></p>	<p><b>Frequency bands</b> 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region</p> <p><b>Communication range</b> up to 1,700 m up to 5,577 ft In an open space</p>	<p><b>Batteries</b> 2 × CR123A Pre-installed</p> <p><b>Battery life</b> up to 7 years</p> <p><b>Installation</b></p> <p><b>Operating temperature range</b> from 0 °C to +50 °C from 32 °F to 122 °F</p> <p><b>Operating humidity</b> up to 80%</p>	<p><b>Color</b> green, yellow, white, blue Depends on the selected version</p> <p><b>Dimensions</b> 102 × 104 × 39 mm 4" × 4.1" × 1.54"</p> <p><b>Weight</b> 214 g 7.54 oz</p>	<p>ManualCallPoint Jeweller SmartBracket mounting panel 2 × CR123A battery (pre-installed) Special tool (key) Transparent protective lid Installation kit Quick start guide</p>



For detailed information, scan the QR code or follow the link:

[ajax.systems/support/devices/manualcallpoints-jeweller](https://ajax.systems/support/devices/manualcallpoints-jeweller)



support@ajax.systems



@AjaxSystemsSupport\_Bot



ajax.systems