

## TurretCam HL

Wired AI-powered security IP camera with hybrid illumination, TrueWDR, microphone, and PoE/12 V. For outdoor and indoor use.



ONVIF

NDA  
Compliant

### Product versions

#### TurretCam HL (5 Mp/2.8 mm)

- 5 MP
- f/2.8 mm (fixed)
- up to 2880 × 1620 px
- 25 fps (3K UHD)
- 100°–110°

#### TurretCam HL (8 Mp/2.8 mm)

- 8 MP
- f/2.8 mm (fixed)
- up to 3840 × 2160 px
- 20 fps (4K UHD)
- 100°–110°

#### TurretCam HL (5 Mp/4 mm)

- 5 MP
- f/4 mm (fixed)
- up to 2880 × 1620 px
- 25 fps (3K UHD)
- 75°–85°

#### TurretCam HL (8 Mp/4 mm)

- 8 MP
- f/4 mm (fixed)
- up to 3840 × 2160 px
- 20 fps (4K UHD)
- 75°–85°

### Clear image with full-color details, day and night

Hybrid illumination in TurretCam HL cameras automatically switches between infrared and white light based on object recognition or motion detection. This ensures high image quality in low-light conditions and at night. The feature provides full-color footage for better object recognition and helps deter intruders when white light is activated.



**up to 50 m (164 ft)**  
IR illumination range



**up to 50 m (164 ft)**  
White light illumination range

### Uncompromising security and privacy

- Passwordless camera authentication via mutual TLS (mTLS) handshake
- TLS-encrypted video streams
- User-controlled access to video content
- Secure video export with digital signature verification
- Multi-tiered account protection: passcodes, biometrics, and two-factor authentication
- Session control for additional account security
- NDAA-compliant components and protocols

### Seamless user experience

- AI-powered object recognition: humans, vehicles, and pets<sup>1</sup>
- High-resolution visual verification of alarms via video scenarios<sup>1</sup>
- Instant transition from notifications to on-site video recordings<sup>1</sup>
- Camera synchronization with security system modes
- Real-time monitoring with a customizable video wall
- True WDR (Wide Dynamic Range) for superior image quality

## Smooth archive navigation

- Proprietary JetSparrow technology for instant, secure video streaming and smooth archive navigation
- Instant access to live view
- Fast archive navigation using event timeline, calendar view, and search filters
- Dual streams for instant preview and optimized bandwidth usage
- Quick video clip export in just a few clicks


## Easy installation and maintenance

- Adding to an Ajax system via QR code
- Remote control and configuration via Ajax apps
- Support for ONVIF/RTSP authorization
- Motion detection zone configuration via Ajax mobile and desktop apps
- Real-time system health monitoring with automatic state checks

## Flexible video surveillance for any scale and scenario

TurretCam HL cameras use Ajax Cloud to transmit system events and JetSparrow technology for fast, secure peer-to-peer video data transmission. With AI-powered object recognition, the camera can identify humans, vehicles, and pets, ensuring only relevant activity is recorded. Strict event filtering helps save storage space and streamlines archive navigation.

Hybrid illumination provides full-color image quality day and night. The camera can be activated depending on the security mode, making video surveillance precisely selective and effective.

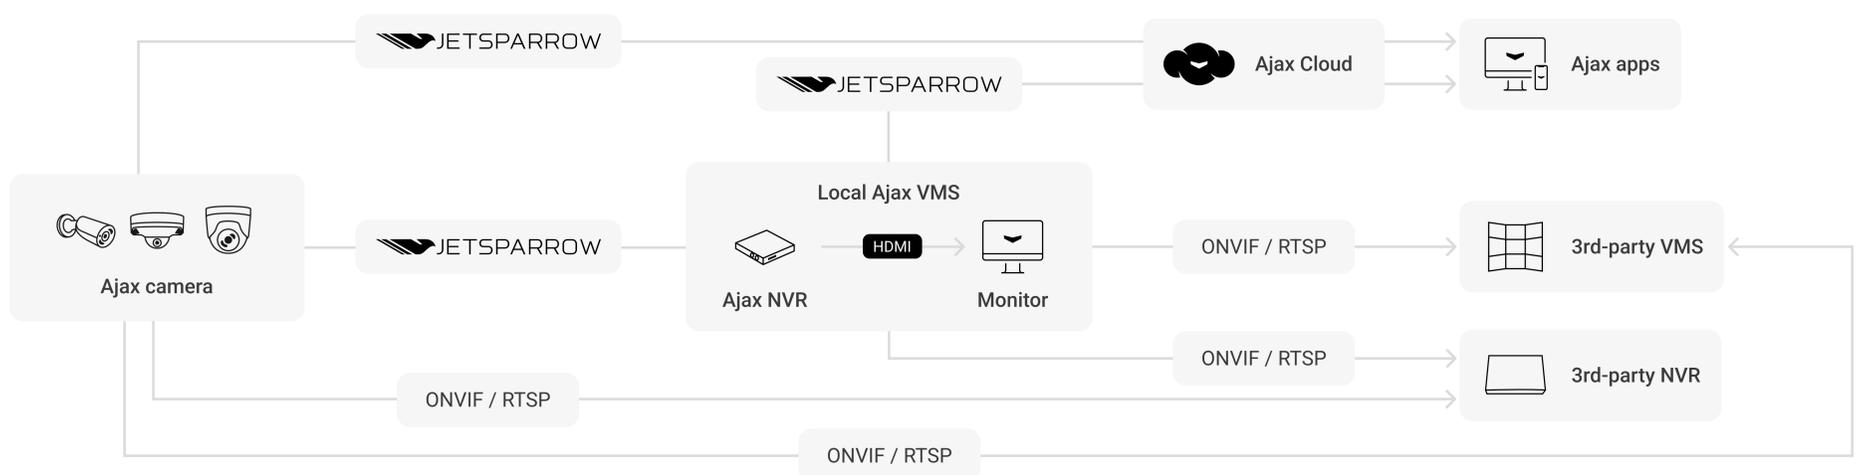

TurretCam HL cameras can operate without the Ajax NVR – the video archive is stored locally on a microSD card if installed.

## DORI distance

Version	Detection	Observation	Recognition	Identification
TurretCam HL (5 Mp/2.8 mm)	65 m (213 ft)	26 m (85 ft)	13 m (42 ft)	6.5 m (21 ft)
TurretCam HL (5 Mp/4 mm)	86 m (282 ft)	34.4 m (112 ft)	17.2 m (56 ft)	8.6 m (28 ft)
TurretCam HL (8 Mp/2.8 mm)	90 m (295 ft)	36 m (118 ft)	18 m (59 ft)	9 m (29 ft)
TurretCam HL (8 Mp/4 mm)	117.5 m (385 ft)	47 m (154 ft)	23.5 m (77 ft)	11.6 m (38 ft)

<p><b>Key features</b></p> <p><b>JetSparrow</b> Proprietary Ajax protocol for fast and secure video transmission</p> <p><b>Motion detection</b> Built-in software to detect motion in the frame</p> <p><b>Object recognition with built-in AI</b> People Pets Vehicles</p> <p><b>Visual verification of Ajax system alarms</b></p> <p><b>Built-in digital microphone</b></p> <p><b>Activate sirens upon detection feature</b></p> <p><b>Automation scenarios</b></p> <p><b>Alarm verification</b> Motion detection AI-powered recognition Detector alarm Automation scenarios</p>	<p><b>Video and optics</b></p> <p><b>Resolution</b> <b>5 MP version:</b> up to 2880 × 1620 px @ 25 fps (3K UHD) <b>8 MP version:</b> up to 3840 × 2160 px @ 20 fps (4K UHD)</p> <p><b>Lens</b> <b>2.8 mm:</b> 100°–110° viewing angle <b>4 mm:</b> 75°–85° viewing angle</p> <p><b>Image processing</b> True WDR hardware and software</p> <p><b>Video compression</b> H.265, H.264</p> <p><b>Bitrate</b> 100 Mbps full-duplex</p> <p><b>Simultaneous live view</b> Up to 5 channels</p> <p><b>Backlight</b> IR illumination White light illumination</p> <p><b>Video stream</b> ONVIF<sup>1</sup> RTSP</p>	<p><b>Enclosure</b></p> <p><b>Dimensions</b> 103 × 98 × 98 mm 4.06" × 3.86" × 3.86"</p> <p><b>Weight</b> 475 g 16.8 oz</p> <p><b>Colors</b> black, white</p> <p><b>Protection class</b> IP65 IK08</p>	<p><b>Power supply</b></p> <p><b>Power supply unit</b> 8–14 V<sub>DC</sub></p> <p><b>Ethernet</b> 10/100 Mbps (RJ-45)</p> <p><b>Ethernet port</b> PoE standard 802.3at/af</p> <p><b>Power consumption</b> up to 8.5 W</p>
			<p><b>Installation</b></p> <p><b>Operating temperature range</b> from -30 °C to +60 °C from -22 °F to +140 °F</p> <p><b>Operating humidity</b> up to 90%</p>
		<p><b>Compliance with standards</b></p> <p>CE RoHS NDAA</p>	<p><b>Complete set</b></p> <p>TurretCam HL Installation template Installation kit Quick start guide</p>

<sup>1</sup> Full support for Profile S, partial support for Profiles T and M.



For detailed information, scan the QR code or follow the link:  
[ajax.systems/support/devices/turretcam-hl/](https://ajax.systems/support/devices/turretcam-hl/)

✉ support@ajax.systems  
📧 @AjaxSystemsSupport\_Bot  
🌐 ajax.systems