

Superior MotionCam (PhOD) Fibra

Wired PIR motion detector with extended photo verification possibilities



This is a device of the Superior product line. Only accredited Ajax Systems partners can sell, install, and administer Superior products.



2
GRADE
EN 50131

PD 6662
2017

INCERT

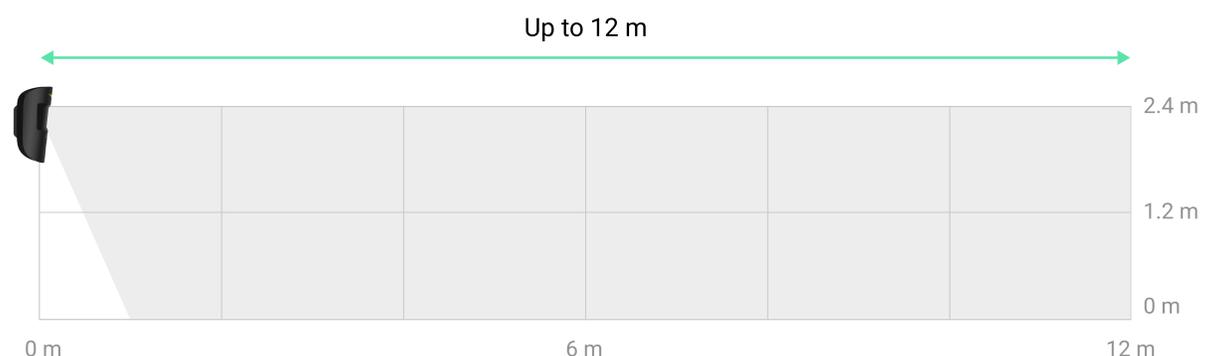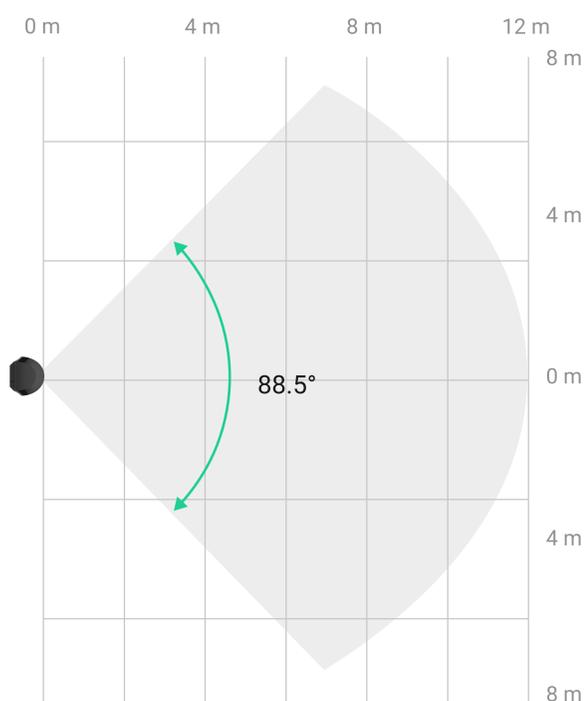

Motion detection

- Up to 12 m (40 ft) of motion detection distance¹
- 88.5° horizontal motion detection angle
- Temperature compensation for motion detection at any operating temperature



False alarm prevention

- SmartDetect software algorithm
- Four sensitivity levels adjustable via Ajax apps
- Pet immunity



Photo verification

- Photo on demand, by alarm, by schedule, by arming/disarming, and by scenario
- Up to 5 photos in a series²
- Up to 9 seconds to deliver the first photo³
- Up to 640 × 480 px photo resolution
- IR illumination for low-light conditions



Fibra communication technology

- Up to 2,000 m (6,550 ft) of encrypted two-way communication⁴
- Data encryption
- Regular polling to display the current device state in Ajax apps



Sabotage resistance

- Device authentication to prevent spoofing or data theft
- Two tampers to detect detaching the detector from the surface or removing it from the mounting panel



Effortless installation and configuration

- Pairing with a hub via Fibra line scanning or QR code
- Remote configuration via mobile and desktop Ajax apps
- Effortless installation and maintenance without the need to disassemble the enclosure

<p>Compatibility with hubs</p> <p>For detailed information, scan the QR code or follow the link:</p>  <p>ajax.systems/tools/devices-compatibility/?models=MC.P.F</p>	<p>Compliance with standards</p> <p>EN 50131 (Grade 2) PD 6662:2017 INCERT</p>	<p>Communication with a hub</p> <p>Fibra communication technology</p> <p>Wired connection U/UTP cat.5 4×2×0.51 mm (24 AWG) cable, copper conductor</p> <p>4×0.22 mm² signal cable, copper conductor</p> <p>Communication range up to 2,000 m up to 6,550 ft With U/UTP cat.5 4×2×0.51 mm (24 AWG) cable</p>	<p>Motion detection</p> <p>Sensitive element 1 × PIR sensor</p> <p>Motion detection distance¹ up to 12 m up to 40 ft When the detector is installed at a height of 2.4 m (7.9 ft)</p> <p>Motion detection angle horizontal: 88.5°</p> <p>Motion detection sensitivity 4 levels Adjusted in Ajax apps</p>
<p>Power supply</p> <p>Main power supply 7–30 V⁼⁼, up to 367 mW The device is powered by the hub or Superior LineSupply Fibra</p> <p>Backup power supply sealed LTO AA battery</p>	<p>Installation</p> <p>Recommended installation height 2.4 m 7.9 ft</p> <p>Operating temperature –10 °C to +40 °C 14 °F to 104 °F</p> <p>Operating humidity up to 75%</p> <p>Protection class IP50</p>	<p>Enclosure</p> <p>Color white, black</p> <p>Dimensions 135 × 70 × 66 mm 5.31" × 2.75" × 2.59"</p> <p>Weight 150 g 5.29 oz</p> <p>Two tampers For sideways installation</p>	<p>Complete set</p> <p>Superior MotionCam (PhOD) Fibra SmartBracket mounting panel Installation kit Quick start guide</p>

¹ According to the INCERT certification, the detection range is up to 10 m (32.8 ft).

² The number of photos in a series depends on the selected photo resolution.

³ With a photo resolution of 320 × 240 pixels.

⁴ With U/UTP cat.5, 4×2×0.51 mm (24 AWG) cable. Other cable types may have different values. Please use the [Fibra power supply calculator](#) to check the wired system project before installation.



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/superior-motioncam-phod-fibra/



support@ajax.systems



@AjaxSystemsSupport_Bot



ajax.systems