

2MP WDR Starlight IR Network MiniPTZ Dome Camera IPC6412LR-X5UPW-VG



Features

- High quality image with 1080P, 1/2.7" CMOS sensor
- 1920 × 1080@30 fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 5X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
- automatic selection of best snapshots
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB optical WDR (wide dynamic range)
- Wi-Fi connection and easy installation
- Built-in mic and speaker, supports two-way audio
- Alarm I/O: 1/1
- Smart IR, up to 30 m (98.4 ft) IR distance


Specifications

| Model | IPC6412LR-X5UPW-VG |
|----------------------------|--|
| Camera | |
| Sensor | 1/2.7" CMOS |
| Min. Illumination | Color: 0.003 Lux (F1.2, AGC ON), 0 Lux with IR |
| Day/Night | IR-cut filter with auto switch (ICR) |
| Shutter | Auto/Manual, 1 to 1/100000 s |
| WDR | 120 dB |
| S/N | >52dB |
| Lens | |
| Focal Length | 2.7 to 13.5 mm |
| Optical Zoom | 5X |
| Iris | F1.2 |
| Field of View (H) | 104.9° to 30.6° |
| Field of View (V) | 55.41° to 17.7° |
| Field of View (D) | 136.37° to 36.1° |
| DORI | |
| DORI Distance (Lens) | 2.7 to 13.5 mm |
| DORI Distance (Detect) | 70.9 m to 247.5 m (232.5 ft. to 812.0 ft.) |
| DORI Distance (Observe) | 28.4 m to 99.0 m (93.2 ft. to 324.8 ft.) |
| DORI Distance (Recognize) | 14.2 m to 49.5 m (46.5 ft. to 162.4 ft.) |
| DORI Distance (Identify) | 7.1 m to 24.8 m (23.3 ft. to 81.4 ft.) |
| Video | |
| Privacy Mask | 24 areas, up to 4 areas per scene |
| Video Compression | Ultra 265, H.265, H.264, MJPEG |
| Frame Rate | Main Stream: 1080P (1920 × 1080), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; Third Stream: D1 (720 × 576), max. 30 fps |
| Video Bit Rate | 128 Kbps to 16 Mbps |
| U-code | Support |
| ROI | Support |
| Video Stream | Triple streams |
| OSD | Up to 8 OSDs |
| Intelligent | |
| Smart Intrusion Prevention | Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle) |
| Exception Detection | Object removed, Object Left Behind, Scene change, Defocus detection |
| Image | |
| White Balance | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2 |
| Digital Noise Reduction | 2D/3D DNR |
| Flip | Normal, Flip vertical, Flip horizontal, 180° |
| HLC | Support |

| | |
|----------------------------|---|
| BLC | Support |
| Smart IR | Support |
| Defog | Digital defog |
| Heatwave Reduction | N/A |
| Illuminator | |
| Light On/Off Control | Auto/Manual |
| Wavelength | 850 nm |
| Illumination Distance (IR) | 30 m (98.4 ft.) |
| Events | |
| Basic Detection | Motion detection, Tampering alarm, Audio detection, Object removed, Object Left Behind, Scene change, Defocus detection |
| General Function | Watermark, IP address filtering, Alarm input, Alarm output, Access policy, ARP protection, RTSP authentication, User authentication |
| Audio | |
| Audio Compression | G.711U, G.711A |
| Audio Bitrate | 128 Kbps |
| Two-way Audio | Support |
| Suppression | Support |
| Sampling Rate | 16KHZ |
| Storage | |
| Edge Storage | MicroSD, up to 512 GB |
| Network Storage | ANR, NAS (NFS) |
| Network | |
| Protocols | SSH, IGMP, RTP, RTCP, SMTP, IPv4, IPv6, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTSP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, 802.1x, SNMP, QoS, SSL/TLS |
| Compatible Integration | ONVIF (Profile S, Profile G, Profile T), API, SDK |
| User/Host | Up to 32 users. 3 user levels: administrator, common user and operator |
| Security | TLS 1.3, Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Client | EZStation, UNV-Link, UNV-Link Pro |
| Web Browser | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+ |
| PTZ | |
| Number of Presets | 1024 |
| Preset Patrol | 16 patrols, up to 64 presets for each patrol |
| Patrol Stay Time | 1800 s to 3600 s |
| Preset Image Freeze | N/A |
| Home Position | Support |
| Pan Range | 350° |
| Tilt Range | 0° to 90° |
| Pan Speed | 0.1°/s to 60°/s |
| Tilt Speed | 0.1°/s to 50°/s |
| Interface | |

| | |
|----------------------|---|
| Audio I/O | N/A |
| Alarm I/O | 1/1 |
| Serial Port | 1 * RS485 |
| Built-in Mic | Support |
| Built-in Speaker | Support |
| Network | 1 × RJ45 10 M/100 M Base-TX Ethernet |
| Video Output | N/A |
| Certification | |
| EMC | CE-EMC (EN 55032: 2015+A1:2020; EN 61000-3-3: 2013+A1: 2019; EN IEC 61000-3-2: 2019+A1: 2021; EN 55035: 2017+A11:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014) |
| Safety | CE LVD (EN 62368-1:2014+A11:2017) CB (IEC 62368-1:2014) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01) |
| Environment | CE-ROHS (2011/65/EU;(EU)2015/863) |
| General | |
| Power | DC 12 V (±25%), PoE (IEEE 802.3at) |
| Power Consumption | Max. 15 W |
| Power Interface | Ø5.5 mm coaxial power plug |
| Dimensions | Ø129 mm × 143.6 mm (Ø5.1" × 5.7") (Ø × H) |
| Weight | 0.76 kg (1.67 lb.) |
| Working Environment | -10 °C to 50 °C (14 °F to 122 °F), Humidity: ≤ 95% RH (non-condensing) |
| Storage Environment | -40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing) |
| Surge Protection | 4 KV |
| Reset Button | Support |
| Material | Plastic |
| Web Client Language | 22 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese, Arabic, Slovak |
| Configurable | |
| P/N | Support |

Dimensions

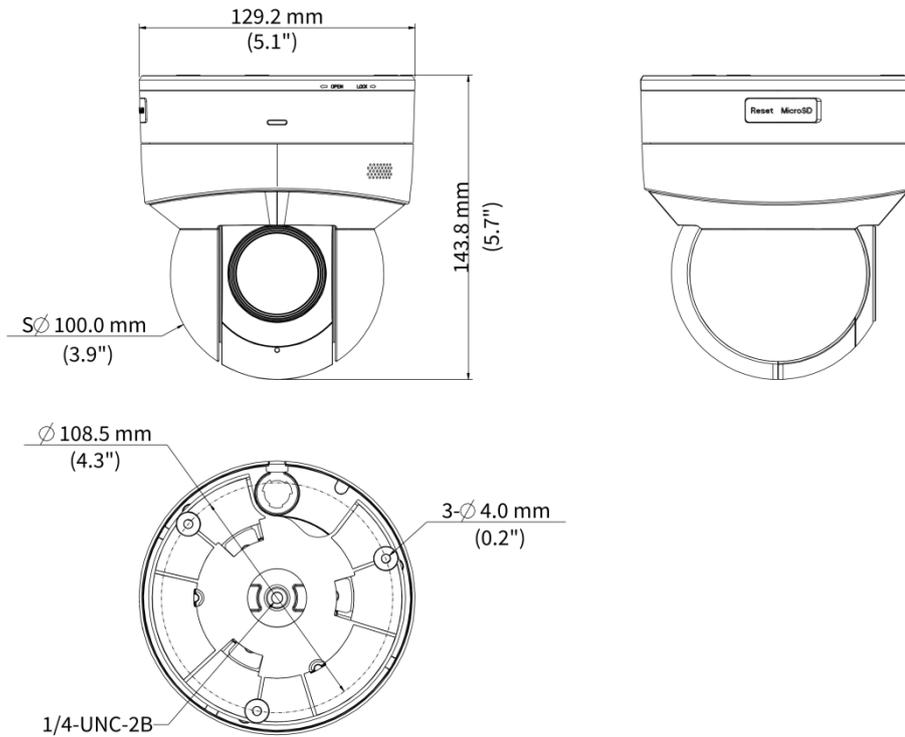

Accessories

TR-JB03-H-IN

Junction Box for Metal Turret Camera(Support wiring from behind)



TR-A01-IN

NPT 3/4" Waterproof Cable Gland



TR-JB07/WM03-F-IN

Wall Mounting Assembling Bracket with Back Hole for 3 Inch Hemisphere



TR-UP06-IN

Universal Pole Mounting Bracket



TR-WM03-B-IN

Wall Mounting Assembling Bracket for 3 Inch Hemisphere



TR-UC08-C

Bullet&Dome Corner Mounting Bracket



Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.