


PRODUCT DATASHEET

MTKBM


CaP System
BNC MALE CONNECTOR

ROHS
COMPLIANT

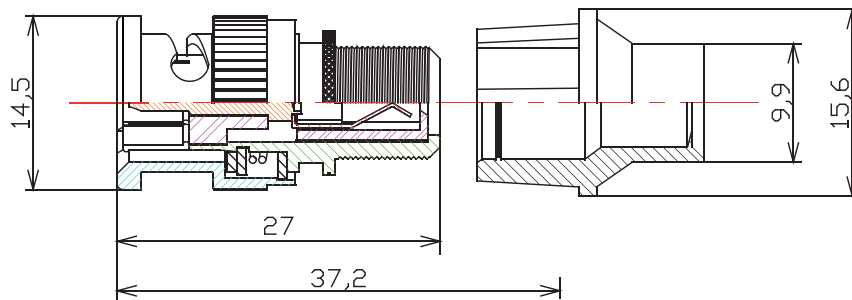


Utilize
This Tool

Stripping Dimension:

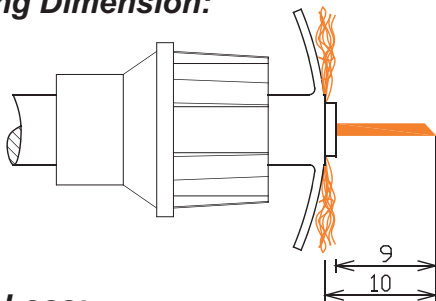

Return Loss:

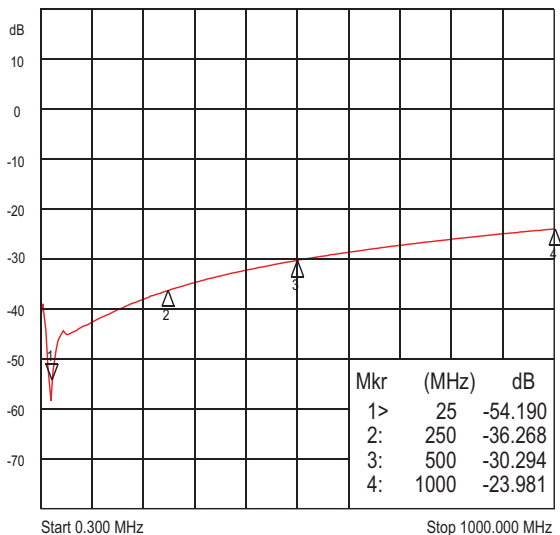

Start 0.300 MHz

Stop 1000.000 MHz

Suitable for Cables:

RG6, RG59, RG178, ... suitable for all cable with inner conductor from $\varnothing 0,2$ up to $\varnothing 1,1$ mm (from AWG 32 to AWG 18)

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Body Material: Brass - Plating: Nickel
Center Contact: Brass - Plating: Gold
Shrapnel: P. Bronze - Plating: Nickel
Insulator: Derlin
Bayonet Cap: Zinc - Plating: Nickel
Gasket: Silicone
Washer: Fe - Plating: Nickel
Spring: SK5 - Plating: Nickel
Inner Retaining Ring: Fe - Plating: Nickel
CaP®: Patented
Weight: 11.4 g

Environmental Specification

Operating Temp: - 40 ÷ + 120 °C

All measures are in millimeters