


CODE: **AWT 8172430** v .1.1/IX
 NAME: **TRANSFORMER TRZ 80/17/24/30**

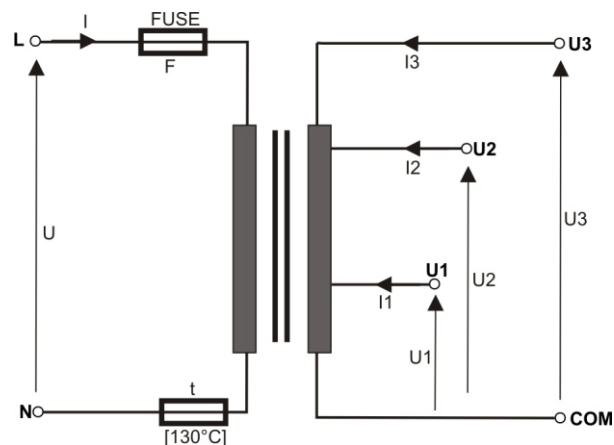

Tab.1

Technical parameters of transformers							
CODE NAME	S	U	I	U1 or U2 or U3	I1 or I2 or I3	F	t
AWT8172430 TRZ 80/17/24/30	80VA	230V/AC	0,4A	17V or 24V or 30V	4,7A or 3,3A or 2,7A	T 630mA/250V	130°C

USE:

The transformers are destined for supplying devices requiring AC voltage U1 or U2 or U3.

TECHNICAL DATA

Casing:	PC/ABS in class UL 94 V-0, IP43
Dimensions:	Fig. 1 TRZ 80VA
Net/ gross weight:	1,70kg /1,78kg [+/-0,1kg] TRZ 80VA
Installation:	installation bus TH35/TS35 (DIN) or cheese screw x 4 (flat surface),with the holder AWO467 for TRZ80VA
Supply voltage:	230 V/AC (-15%+10%), 50Hz
Current consumption I:	tab.1. @~230 V / I1
Output voltage U1 or U2 or U3:	tab.1.
Rated power S:	tab.1.
Rated output current I1 or I2 or I3:	tab.1.
Short-circuit protection F:	fuse tab.1.
Over-load protection t:	fuse tab.1. / temperature limit fuse 130°C-non resetable
Operating conditions:	2nd environmental class, -10°C+ 40°C, Ta 40 B
Certificates, declarations:	CE, RoHS, 2 year from the production date
Remarks:	leads on connectors AWG 24-12 2,5mm ² , screw 2,9 x 9,5 - 4pcs.

Dimensions of transformers series: TRZ 80VA

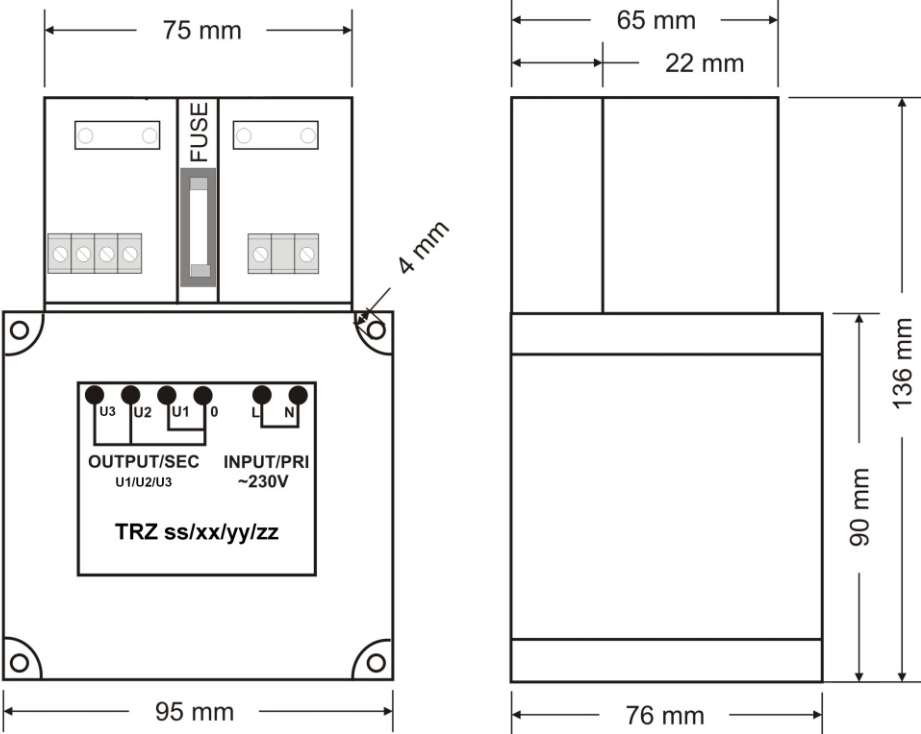


Fig.1