





Right side

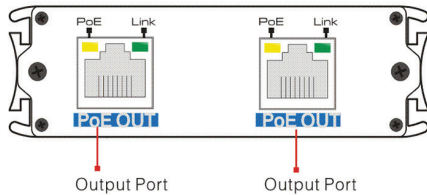

Output Port


Output Port

Left side

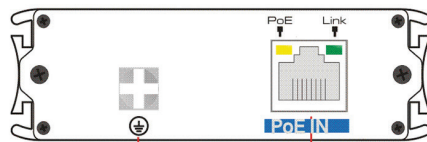

Grounding Terminal

Input Port

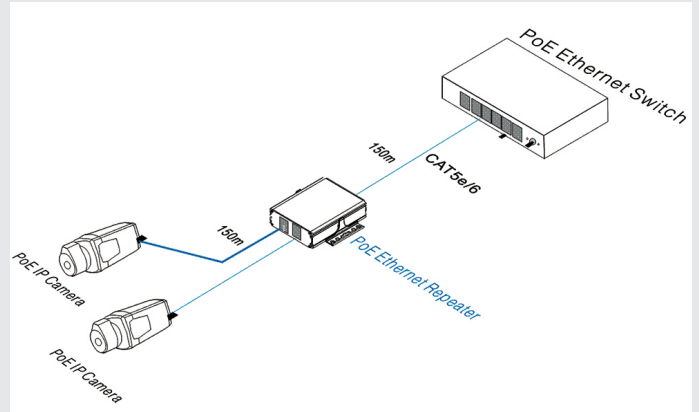

TECHNICAL SPECIFICATIONS

Model	MT-TP7201ER-POE	
Power	Power Supply	PoE Power Supply
	Consumption	<3W
Ethernet Port	Ethernet Port	PoE IN Port:10/100Mbps, PoE Input Port PoE OUT Port:10/100Mbps, PoE Output Port
	Transmission Distance	150m(About the relationship between distance and power, Please refer to table 1)
	Transmission Medium	Cat5e/6
	PoE Protocol	Support IEEE802.3af, IEEE802.3at Protocol
	PoE Mode	Compatible with End-span and Mid-span
Network Switch	Network Standard	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX
	Network Delay	<20us
LED Status Indicator	LED	PoE IN Port and PoE OUT Port: RJ45 yellow light indicates PoE status; green light indicates data exchange
Protection	ESD	1a Contact Discharge Level 3 1b Air Discharge Level 3 Per: IEC61000-4-2
	Communication port Lightning protection	Per: IEC61000-4-5 Level 3
Environmental	Working Temperature	-40°C~75°C
	Storage Temperature	-40°C~85°C
	Humidity (non-condensing)	0-95%
Mechanical	Dimension (L×W×H)	103mm×82mm×25mm
	Material	Aluminum
	Color	Black
	Weight	195g
Stability	MTBF	>30000h

Datasheet rev.A15.5

FEATURES

- Repeater che permette di estendere fino a 300m il segnale ethernet e Poe senza bisogno di ulteriore alimentazione
- 3x 10/100Mbps porte Ethernet, una porta Poe input e due porte POE output
- Rispetta gli standard IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3af/at
- Eccellente protezione da scariche e interferenze
- Installazione plug and play non richiede nessun settaggio