




## FEATURES

- Power: AC100V~AC240V@50/60Hz;
- Power Rate: ≤30W;
- Transmission Medium: Cat5/5e/6 standard cable;
- Standard: IEEE802.3af/at;
- Protection: Wide voltage AC Input. Strong lightning protection, ESD, anti-interference;
- Structure: Support tablet and wallet installation. 2 set of POE power adapter can connect with the bayonet.

## Application

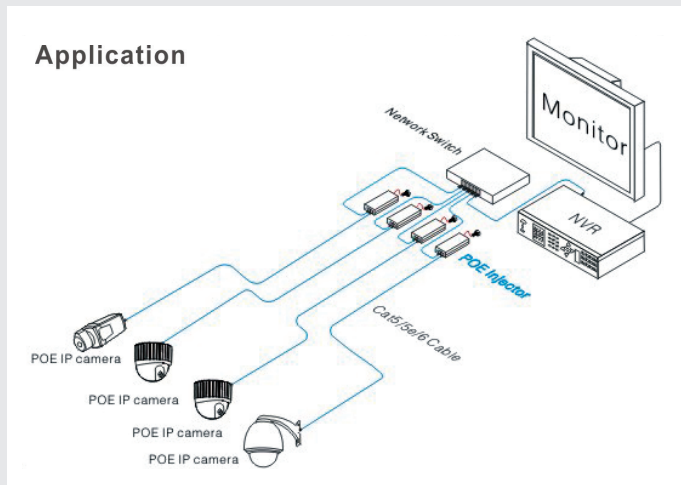

## TECHNICAL SPECIFICATIONS

Model	MT-TP701-PSE	
Power	Power	Electric Supply
	Power Voltage	AC 100V~240V
	Output Power Rate	≤30W
Network Port	Communication Port	1×RJ45 Input
	Transmission Rate	10/100Mbps, 10/100/1000Mbps
	Transmission Medium	Cat5/5e/6 Cable
	Distance	100m(Max)
Status	Power LED	1(Green)
	PoE LED	1 (Yellow)
Protection	Surge Protection	1KV Per: IEC61000-4-5
	ESD	1a Contact Discharge Level 3 1b Air Discharge Level 3 Per: IEC61000-4-2
Environmental	Working temperature	0°C~55°C
	Storage temperature	-40°C-85°C
	Humidity	0-90%
Mechanical	Dimension	120mm×62mm×39mm
	Material	ABS Material
	Color	Black
	Weight	200g
Stability	MTBF	>30000h

Datasheet rev.A15.6

