

MT-TP2105A

HDCVI Video Converter




Features

- Self-adaptive output HDCVI, HDMI, VGA, CVBS signal
- Lossless real time non-compression transmission
- Support 2 dial switches and indicate 4 Baud rate: 2400b/s, 4800b/s, 9600b/s and 115200b/s
- LED indicators
- Fully enclosed dustproof design

Specifications

Model	MT-TP2105A
Physical Port	
Function Port	3*BNC ports (1/ 2 channel In/Out (1*HDCVI, 1*CVBS)), 1*HDMI, 1*VGA, 1*RS485
Dial Switch	2 dial switch indicate 4 Baud rate s: 2400b/s, 4800b/s, 9600b/s, 115200b/s
Other	
Indicator	Video indicator , power indicator, data indicator
Power	DC12V 2A
Power Consumption	≤ 15W
Temperature	-10°C ~55°C
Humidity	10%~90% RH
Unit Weight	200g
Dimension	162mm× 136.4 mm× 30mm
Installation	Wall mount

Dimensions (mm)

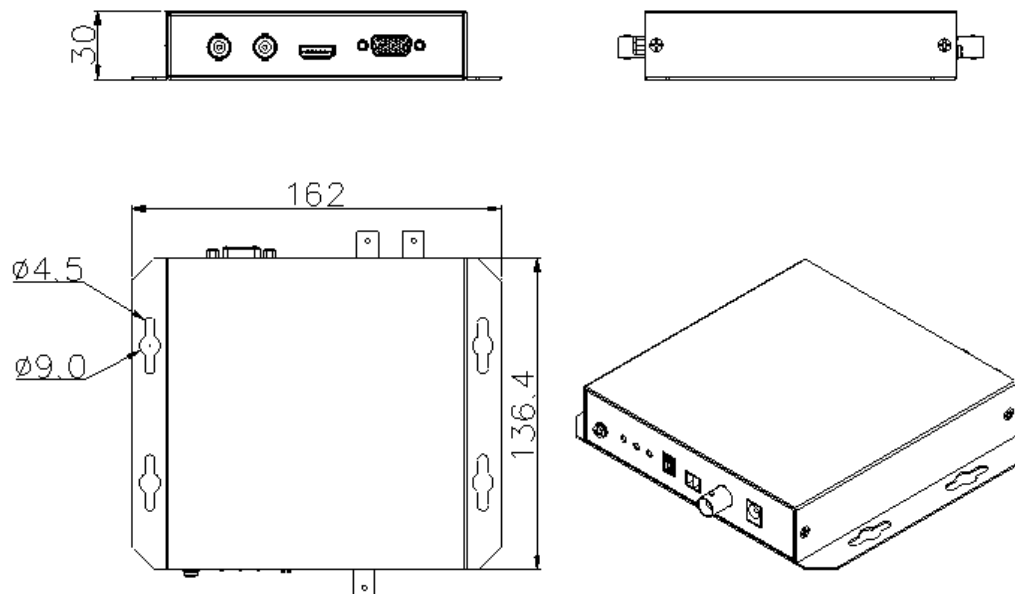

Application

