



## FEATURES

- Built of aluminum alloy and SECC steel, durable and corrosion-resistant
- IP66 rated weather protection for outdoor installations
- Large enclosure accommodates power adapters, circuit breakers and surge protectors
- Supports wall mount, pole mount and corner mount installation methods
- Load bearing capacity: 8.0 kg (17.64 lb)
- Wide operating temperature range: -40 °C to +60 °C


## TECHNICAL SPECIFICATIONS

Structure	
<b>Casing Material</b>	Aluminum alloy & SECC
<b>Product Dimensions</b>	297.2 mm x 248.0 mm x 130.7 mm (11.70" x 9.76" x 5.15") (L x W x H)
<b>Appearance Color</b>	White
<b>Net Weight</b>	3.38 kg (7.45 lb)
<b>Gross Weight</b>	3.86 kg (8.51 lb)
<b>Load Bearing</b>	8.0 kg (17.64 lb)
<b>Installation</b>	Wall mount; pole mount; corner mount
<b>Screw Thread Type</b>	G1/2
<b>Packaging Dimensions</b>	366.0 mm x 298.0 mm x 183.0 mm (14.41" x 11.73" x 7.20") (L x W x H)

Environment	
<b>Protection</b>	IP66
<b>Operating Temperature</b>	-40 °C to +60 °C (-40 °F to +140 °F)
<b>Operating Humidity</b>	< 90% (RH)
<b>Storage Temperature</b>	-40 °C to +60 °C (-40 °F to +140 °F)
<b>Storage Humidity</b>	10% - 90% (RH)
<b>Anti-corrosion Level</b>	Basic Protection

# MT-MFA140

## DIMENSIONS

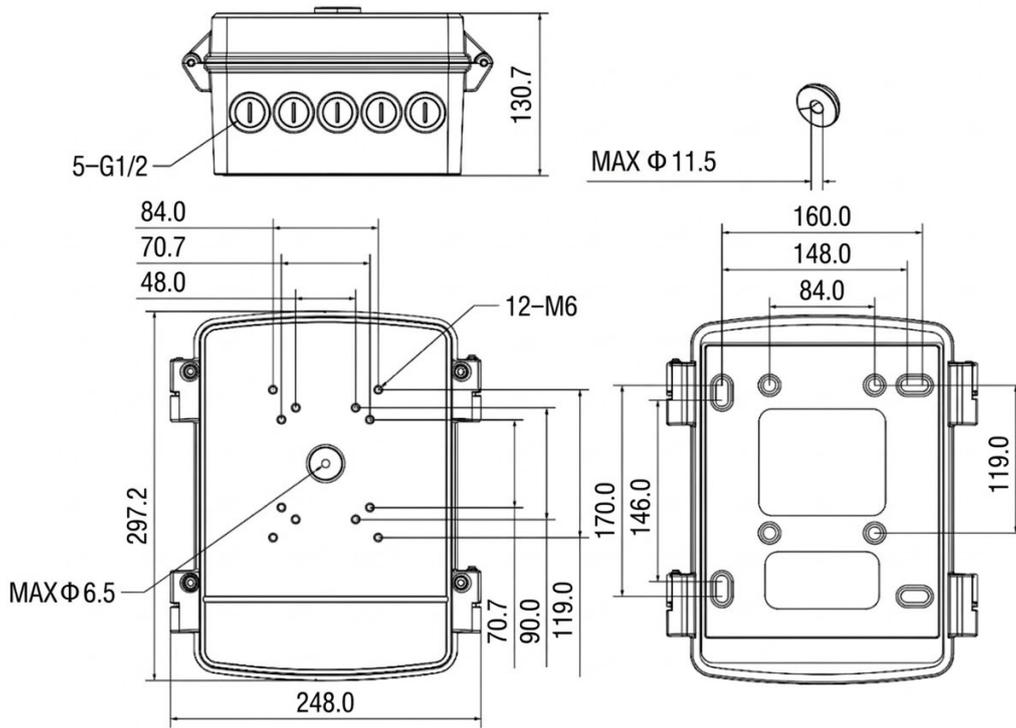

## INTERNAL VIEW

