




### FEATURES

- 1/2.8" 2.1Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- Dual-output HD-CVI, PAL/NTSC - 1 Vpp / 75 Ω
- OSD Menu, control over coaxial cable
- 120dB True WDR, Day/Night(ICR), AWB, AGC, BLC, DNR
- Audio, Alarm
- AC24V/DC12V

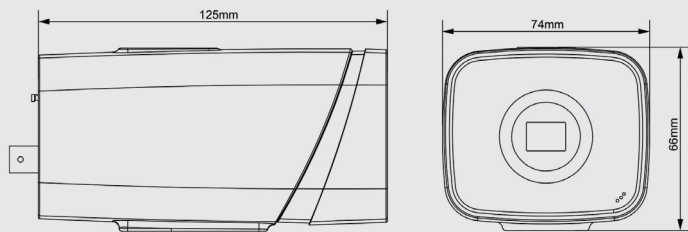

### TECHNICAL SPECIFICATIONS

Model	MT-HDCS3200	
Camera	Image Sensor	1/2.8" 2.1Megapixel CMOS
	Effective Pixels	1945(H) x 1097(V)
	Electronic Shutter	1.3s~1/30,000s
	Video Frame Rate	25/50fps@720P; 25fps@1080P
	Synchronization	Internal
	Mini. Illumination	0.005Lux/F1.4 (color); 0.0005Lux/F1.4 (B/W)
	Video Output	1-channel BNC HDCVI high definition video output & CVBS standard definition video output
Camera Features	Day/Night	Auto(ICR) / Color / B/W
	Noise Reduction	2D/3D
	OSD Menu	Support
Lens	Lens Type	Manual/Auto Iris
	Mount Type	C/CS
Auxiliary Interface	RS485	1
	Alarm	2 channel in/ 1 channel out
	Audio	1 channel in
General	Power Supply	AC24V±25% / DC12V±25%
	Power Consumption	Max 4.7W
	Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
	Transmission Distance	Over 500m via 75-3 coaxial cable
	Dimensions(W×D×H)	125mm×74mm×66mm
	Weight	0.48kg
	Material	Metal