




### FEATURES

- Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format.
- Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled).
- Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding.
- AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus.
- AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map.
- Connected to the third-party network cameras.
- Security baseline 2.3.

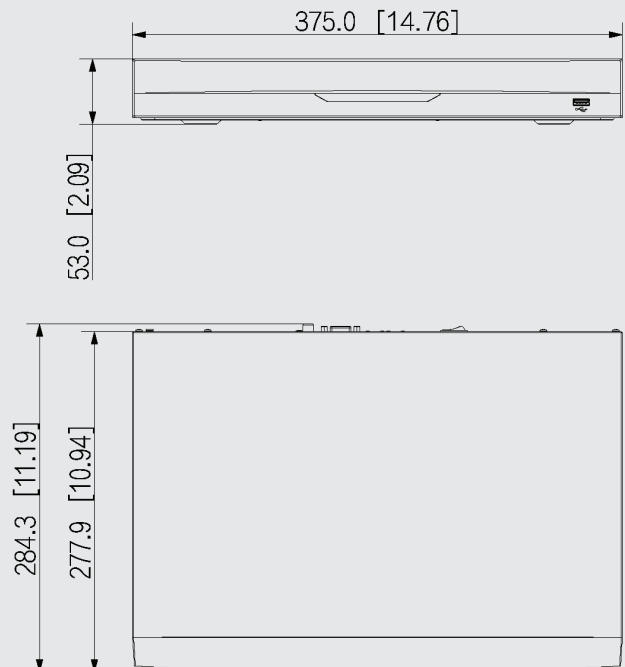

## TECHNICAL SPECIFICATIONS

<b>System</b>	<b>Main Processor</b>	Industrial-grade processor	<b>Audio and Video</b>	<b>Access Channel</b>	8 channels		
	<b>Operating System</b>	Embedded Linux		<b>Network Bandwidth</b>	AI disabled: 256 Mbps incoming, 256 Mbps recording and 256 Mbps outgoing AI enabled: 180 Mbps incoming, 180 Mbps recording and 180 Mbps outgoing		
	<b>Operating Interface</b>	Web, Local GUI			<b>Resolution</b>	16 MP; 12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 960p; 720p; D1; CIF	
<b>AI</b>	<b>AI by Recorder</b>	Face detection; face recognition; perimeter protection; SMD Plus		<b>Decoding Capability</b>		AI disabled: 2-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 4-channel 8 MP@30 fps; 6-channel 5 MP@30 fps; 8-channel 4 MP@30 fps	
	<b>AI by Camera</b>	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map			AI enabled: 1-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 3-channel 8 MP@30 fps; 4-channel 5 MP@30 fps; 6-channel 4 MP@30 fps; 8-channel 1080p@30 fps		
<b>Perimeter Protection</b>	<b>Perimeter Performance AI by Recorder (Number of Channels)</b>	2 channels, 10 IVS rules for each channel			<b>Video Output</b>	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.	
	<b>Perimeter Performance of AI by Camera (Number of Channels)</b>	8 channels				<b>Multi-screen Display</b>	1st Screen: 1/4/8/9 2nd Screen: 1/4/8/9
<b>Face Detection</b>	<b>Face Attributes</b>	Gender; age group; glasses; expressions; face mask; beard		<b>Third-party Camera Access</b>	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, ONVIF, Canon		
	<b>Face Detection Performance of AI by Recorder (Number of Channels)</b>	1 channel (up to 12 face images/s each channel)			<b>Compression Standard</b>	<b>Video Compression</b>	Smart H.265+; H.265; Smart H.264+; H.264; MJPEG
	<b>Face Detection Performance of AI by Camera (Number of Channels)</b>	8 channels				<b>Audio Compression</b>	G.711a; G.711u; PCM; G726
<b>Face Recognition</b>	<b>Face Database Capacity</b>	Up to 10 face databases with 20,000 images, with a total capacity of 2.5 G. Name, gender, birthday, address, credential type, credential No., countries & regions and state can be added to each face image.	<b>Network</b>	<b>Network Protocol</b>	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; PPPoE; DDNS; FTP; Alarm Server; IP Search (Supports Mtechnology IP camera, DVR, NVS, etc.); P2P; auto register		
	<b>Face Recognition Performance of AI by Recorder (Number of Channels)</b>	8-channel FD (by camera) + FR (by recorder), image stream: 12 face images/s 1-channel FD (by recorder) + FR (by recorder), video stream: 12 face images/s		<b>Mobile Phone Access</b>	iOS; Android		
	<b>Face Recognition Performance of AI by Camera (Number of Channels)</b>	8 channels		<b>Interoperability</b>	ONVIF 22.06(Profile T; Profile S; Profile G); CGI; SDK		
<b>SMD Plus</b>	<b>SMD Plus by Recorder</b>	4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change	<b>Browser</b>	Chrome; IE9 and later; Firefox			
	<b>SMD Plus by Camera</b>	8 channels					

# MT-NVR4008AI

## TECHNICAL SPECIFICATIONS

Recording Playback	Multi-channel Playback	Up to 8 channels
	Record Mode	General, motion detection; intelligent; alarm;
	Backup Method	USB device and network
	Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback
Storage	Disk Group	Yes
Alarm	General Alarm	Motion detection; privacy masking; video loss; scene changing; PIR alarm; IPC external alarm
	Anomaly Alarm	Camera disconnection; storage error; disk full; IP conflict; MAC conflict; login locked; and cybersecurity exception
	Intelligent Alarm	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
	Alarm Linkage	Record; snapshot; IPC external alarm output; audio; buzzer; log; preset; email
Port	Audio Input	1-channel RCA
	Audio Output	1-channel RCA
	Alarm Input	4 channels
	Alarm Output	2 channels
	HDD Interface	2 SATA ports, up to 16 TB. The maximum HDD capacity varies with environment temperature.
	USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)
	HDMI	1
	VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)	
General	Power Supply	12 VDC, 4 A
	Power Consumption	<10 W(without HDD)
	Net Weight	1.51 kg (3.33 lb)
	Gross Weight	2.76 kg (6.08 lb)
	Product Dimensions	375 mm × 284.3 mm × 53 mm (14.76" × 11.19" × 2.09") (W × L × H)
	Packaging Dimensions	433 mm × 141 mm × 366 mm (17.05" × 5.55" × 14.41") (W × L × H)
	Operating Temperature	-10 °C to +55 °C (14 °F to +131 °F)
	Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Certifications	Operating Humidity	10%–93% (RH)
	Installation	Rack or desktop
Certifications		FCC: 47 CFR FCC Part15, SubpartB, Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014