




FEATURES

- Up to 4/8 channel IP camera input
- H.264/H.265 codec decoding
- Max 80Mbps incoming bandwidth
- Up to 5Mp resolution preview&playback
- HDMI/VGA 4K simultaneous video output
- All channel synchronous realtime playback, GRID interface
- Support Multi-brand network cameras: Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dahua, Dynacolor, Honeywell, Mtechnology, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- ONVIF Version 2.4 conformance
- 3D intelligent positioning with Mtechnology PTZ camera
- Support 1 SATA HDD up to 10TB, 2 USB2.0
- Multiple network monitoring: Web viewer, CMS(DSS/ PSS) & DMSS

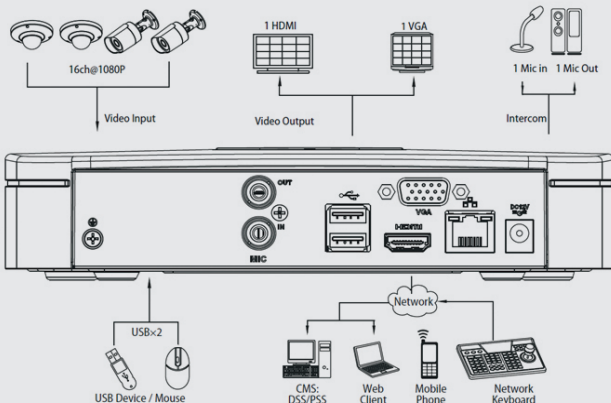

TECHNICAL SPECIFICATIONS

Model	MT-NVR4104P	MT-NVR4104P
System	Main Processor	Dual-core embedded processor
	Operating System	Embedded LINUX
Video & Audio	IP Camera Input	4 channel 8 channel
	Two-way Talk	1channel Input, 1channel Output, RCA
Display	Interface	1 HDMI,1 VGA
	Resolution	4K HDMI 1920×1080, 1280×1024, , 1024×768
	Display Split	1/4 1/4/8/9
	OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	Compression	H.264/H.265
	Resolution	8Mp 5Mp/3Mp-(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480)
	Record Rate	80Mbps
	Bit Rate	48~ 8192kbps
	Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Video Detection & Alarm	Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
	Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips
Playback & Backup	Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
	Sync Playback	1/4 1/4/8
	Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
	Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Network	Backup Mode	USB Device/Network/Internal SATA burner
	Ethernet	1 RJ-45 port (10/100Mbps)
	PoE	4 ports (IEEE802.3at/af)
	Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search (Support Mtechnology IP camera, DVR, NVS and etc.)
	Max. User Access	128users
Storage	Smart Phone	iPhone, iPad, Android
	Internal HDD	1 SATA port, up to 4TB
Auxiliary Interface	USB	2 ports (2 Rear),USB2.0
General	Power Supply	DC12V/2A
	Power Consumption	10W(without HDD)
	Working Environment	-10°C~+55°C / 10%~90%RH / 86~106kpa
	Dimensions	Smart 1U, 260mm×225mm×48mm
Weight	1.5KG(without HDD)	