



FEATURES

- Built of aluminum alloy, cost-effective and robust
- Suitable for a variety of cameras, elegant design
- Includes an embedded junction box for easy cable management
- IP66 rated weather protection
- Load bearing capacity: 4.0 kg (8.82 lb)
- Wide operating temperature range: -40 °C to +60 °C

TECHNICAL SPECIFICATIONS





Structure	
Casing Material	Aluminum alloy
Product Dimensions	187.5 mm x 134.0 mm x 133.4 mm (7.38" x 5.28" x 5.25") (L x W x H)
Appearance Color	White
Net Weight	0.71 kg (1.57 lb)
Gross Weight	0.85 kg (1.87 lb)
Load Bearing	4.0 kg (8.82 lb)
Installation	Wall mount
Screw Thread Type	G1 1/2, G3/4
Packaging Dimensions	252 mm x 137 mm x 137 mm (9.92" x 5.39" x 5.39") (L x W x H)

Environment	
Protection	IP66
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10% - 90% (RH)
Anti-corrosion Level	Basic Protection

MT-FB302S

DIMENSIONS

mm

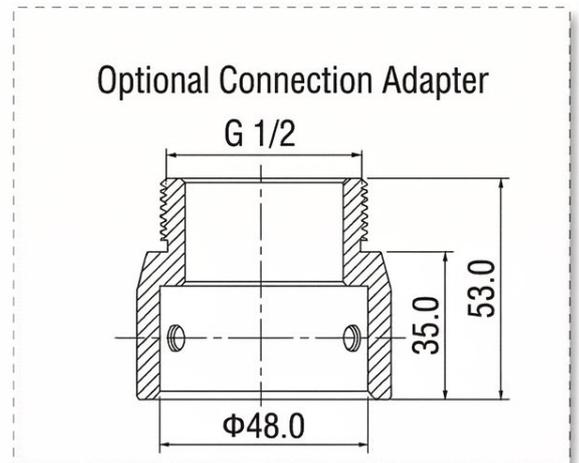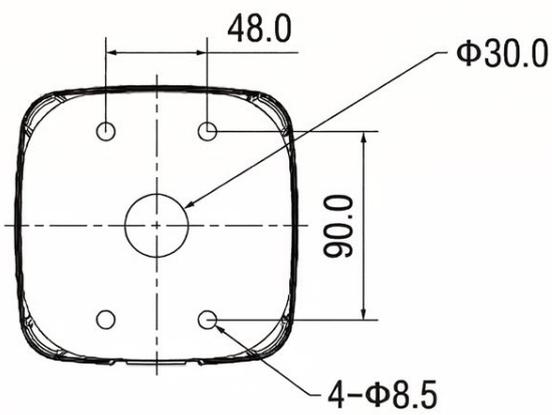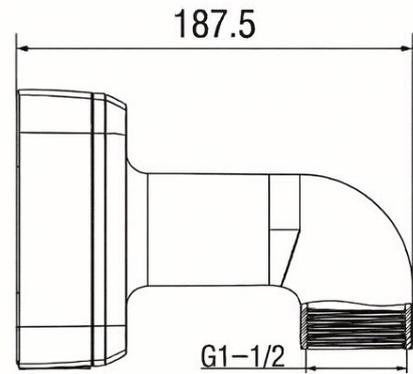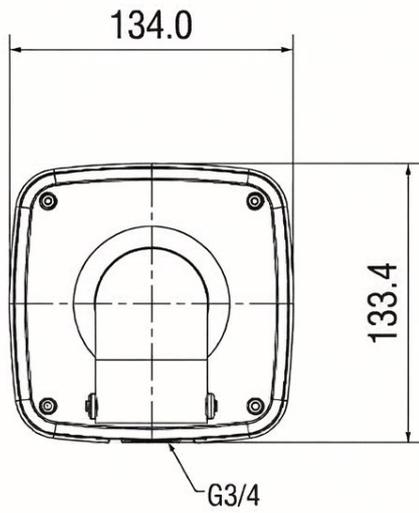

Datasheet rev. A26.03