


FEATURES

- H.265+/H.265 dual-stream video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth
- Up to 2 channels video stream (analog channel) human face recognition
- IoT & POS functionalities

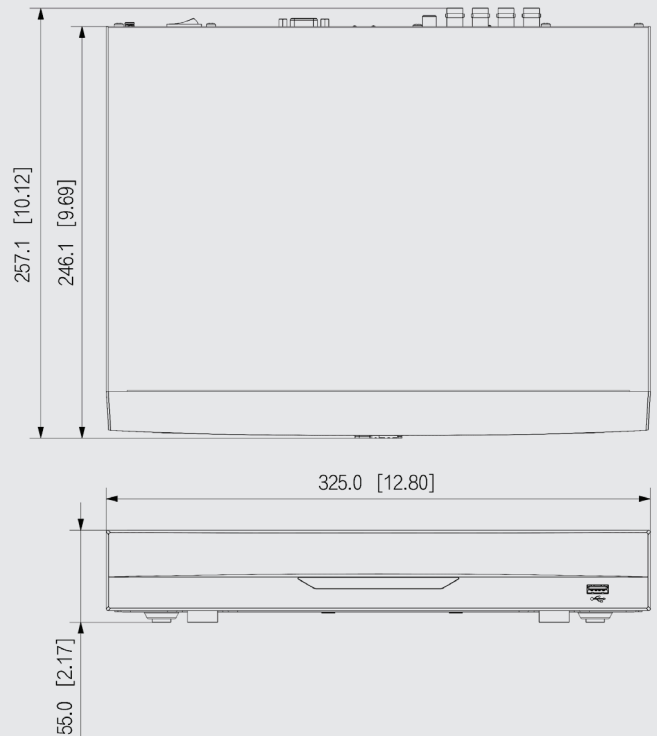

MT-NCXVR7108-4KA

TECHNICAL SPECIFICATIONS

System	Main Processor	Embedded Processor	
	Operating System	Embedded Linux	
Perimeter Protection	Performance	2 channels, 10 IVS for each channel	
	Object classification	Human/Vehicle secondary recognition for tripwire and intrusion	
	AI Search	Search by target classification (human, vehicle)	
Face Recognition	Performance	Max 12 face pictures/sec processing 2 channels video stream face recognition, only support analog camera	
	Stranger Mode	Detect strangers' faces (not in device's face database). Similarity threshold can be set manually	
	AI Search	Up to 8 target face images search at same time, similarity threshold can be set for each target face image	
	Database Management	Up to 10 face databases with 5,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries@ions and state can be added to each face picture	
	Database Applicationment	Each database can be applied to video channels independently	
	Trigger Events	Buzzer, Voice Prompts, Email, Snapshot, Recording, Alarm Out, PTZ Activation, etc.	
	Smart Motion	Performance	8 channels
	AI Search	Search by target classification (human, vehicle)	
Video and Audio	Analog Camera Input	8 channels, BNC	
	HDCVI Camera Input	4K, 6MP, 5MP, 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps	
	AHD Camera Input	4K, 5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps	
	TVI Camera Input	4K, 5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps	
	CVBS Camera Input	PAL/NTSC	
	IP Camera Input	8+8 channels, each channel up to 8MP	
	Audio In/Out	1/1, RCA	
	Two-way Talk	Reuse audio in/out, RCA	
	Recording	Compression	AI Coding/H.265+/H.265/H.264+/H.264
		Resolution	4K, 6MP, 5MP, 4K-N, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF
Record Rate		Main stream: All channel 4K(1fps-7fps); 6MP(1fps-10fps); 5MP(1fps-12fps); 4K-N, 4MP/3MP(1fps-15fps); 4M-N/1080P/720P/960H/D1/CIF (1fps-25/30fps); Sub stream:960H(1fps-15fps); D1/CIF(1fps-25/30fps)	
Bit Rate		32 Kbps-6144 Kbps Per Channel	
Record Mode		Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop	
Record Interval		1 - 60 min (default: 60 min), Pre-record: 1 s-30 s, Post-record: 10 s-300 s	
Audio Compression		G.711A, G.711U, PCM	
Audio Sample Rate		8 KHz, 16 bit Per Channel	
Audio Bit Rate		64 Kbps Per Channel	

Display	Interface	1 HDMI ,1 VGA
	Resolution	HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
	Multi-screen Display	When IP extension mode not enabled: 1/4/8/9 When IP extension mode enabled: 1/4/8/9/16
	OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Network	Interface	1 RJ-45 Port (1000 MB)
	Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, SNMP, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Mtechnology IP camera, DVR, NVS, etc.)
	Max. User Access	128 users
	Smart Phone	iPhone, iPad, Android
	Interoperability	ONVIF 16.12, CGI Conformant
Video Detection and Alarm	Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
	Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis
Playback and Backup	Playback	1/4/9/16
	Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
	Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
	Backup Mode	USB Device/Network
Storage	Internal HDD	1 SATA Port, up to 10TB capacity
Auxiliary Interface	USB	2 USB Ports (1 USB 2.0 , 1 USB 3.0)
	RS485	1 Port, for PTZ Control
Electrical	Power Supply	DC 12V/2A
	Power Consumption (Without HDD)	<10W
Construction	Dimensions	Mini 1U, 325 mm × 257 mm × 55 mm (12.80" × 10.11" × 2.17")
	Net Weight (without HDD)	1.2 kg (2.6 lb)
	Gross Weight	1.4 kg (3.1 lb)
	Installation	Desktop installation
Electrical	Operating Conditions	-10°C to +55°C (+14°F to +131°F), 0-90% RH
	Storage Conditions	-20°C to +70°C (-4°F to +158°F), 0-90% RH
Third-party Support	Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Mtechnology, Dynacolor, Honeywell, Mtechnology, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more	
Certifications	FCC: Part 15 Subpart B	
	CE: CE-LVD: EN 60950-1/IEC 60950-1	
	CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024	

Datasheet rev.A21.4