


FEATURES

- Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format.
- Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled).
- Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding.
- AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus.
- AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map.
- Connected to the third-party network cameras.
- Security baseline 2.3.

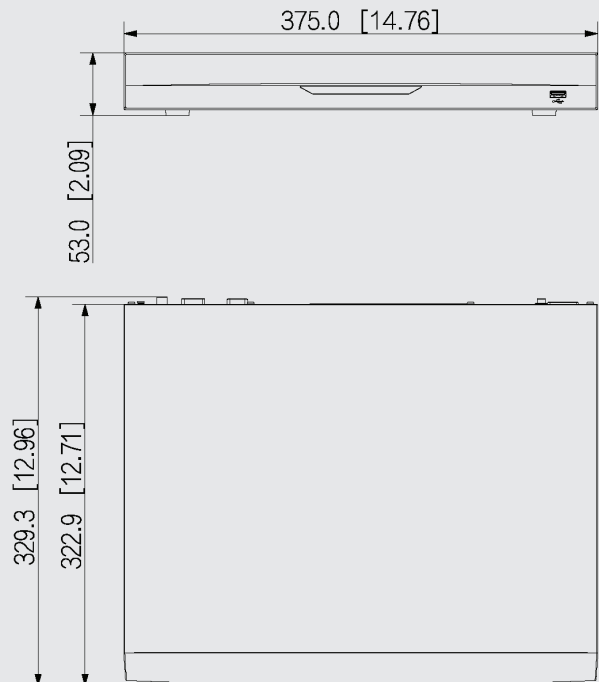

MT-NVR3216AI-4KP

TECHNICAL SPECIFICATIONS

System	Main Processor	Industrial-grade processor
	Operating System	Embedded Linux
	Operating Interface	Web, Local GUI
AI	AI by Recorder	Face detection; face recognition; perimeter protection; SMD Plus
	AI by Camera	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
Perimeter Protection	Perimeter Performance AI by Recorder (Number of Channels)	2 channels, 10 IVS rules for each channel
	Perimeter Performance of AI by Camera (Number of Channels)	8 channels
Face Detection	Face Attributes	Gender; age group; glasses; expressions; face mask; beard
	Face Detection Performance of AI by Recorder (Number of Channels)	1 channel (up to 12 face images/s each channel)
	Face Detection Performance of AI by Camera (Number of Channels)	8 channels
Face Recognition	Face Database Capacity	Up to 10 face databases with 20,000 images, with a total capacity of 2.5 G. Name, gender, birthday, address, credential type, credential No., countries & regions and state can be added to each face image.
	Face Recognition Performance of AI by Recorder (Number of Channels)	8-channel FD (by camera) + FR (by recorder), image stream: 12 face images/s 1-channel FD (by recorder) + FR (by recorder), video stream: 12 face images/s
	Face Recognition Performance of AI by Camera (Number of Channels)	8 channels
SMD Plus	SMD Plus by Recorder	4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
	SMD Plus by Camera	8 channels

Audio and Video	Access Channel	16
	Network Bandwidth	AI disabled: 256 Mbps incoming, 256 Mbps recording and 256 Mbps outgoing AI enabled: 180 Mbps incoming, 180 Mbps recording and 180 Mbps outgoing
	Resolution	16 MP; 12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 960p; 720p; D1; CIF
	Decoding Capability	AI disabled: 2-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 4-channel 8 MP@30 fps; 6-channel 5 MP@30 fps; 8-channel 4 MP@30 fps; 16-channel 1080p@30 fps AI enabled: 1-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 3-channel 8 MP@30 fps; 4-channel 5 MP@30 fps; 6-channel 4 MP@30 fps; 12-channel 1080p@30 fps
	Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.
	Multi-screen Display	1st Screen: 1/4/8/9/16 2nd Screen: 1/4/8/9/16
	Third-party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, ONVIF, Canon
Compression Standard	Video Compression	Smart H.265+; H.265; Smart H.264+; H.264; MJPEG
	Audio Compression	G.711a; G.711u; PCM; G726
Network	Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; PPPoE; DDNS; FTP; Alarm Server; IP Search (Supports Mtechnology IP camera, DVR, NVS, etc.); P2P; auto register
	Mobile Phone Access	iOS; Android
	Interoperability	ONVIF 22.06(Profile T; Profile S; Profile G); CGI; SDK
	Browser	Chrome; IE9 and later; Firefox

Datasheet rev.A23.10

MT-NVR3216AI-4KP

TECHNICAL SPECIFICATIONS

Recording Playback	Multi-channel Playback	Up to 16 channels
	Record Mode	General, motion detection; intelligent; alarm
	Backup Method	USB device and network
	Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback
Storage	Disk Group	Yes
Alarm	General Alarm	Motion detection; privacy masking; video loss; scene changing; PIR alarm; IPC external alarm
	Anomaly Alarm	Camera disconnection; storage error; disk full; IP conflict; MAC conflict; login locked; and cybersecurity exception
	Intelligent Alarm	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
	Alarm Linkage	Record; snapshot; IPC external alarm output; audio; buzzer; log; preset; email
Port	Audio Input	1-channel RCA
	Audio Output	1-channel RCA
	Alarm Input	4 channels
	Alarm Output	2 channels
	HDD Interface	2 SATA ports, up to 16 TB. The maximum HDD capacity varies with environment temperature.
	RS-232	1
	USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)
	HDMI	1
	VGA	1
	Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)
PoE Port	16 ports, 10/100 Mbps, IEEE 802.3 af/at	
General	Power Supply	100–240 VAC, 47–63 Hz
	Power Consumption	Total output of NVR is <10 W (without HDD) Total output power of PoE is 130W, the maximum output power of a single port is 25.5W
	Net Weight	2.60 kg (5.73 lb)
	Gross Weight	3.80 kg (8.38 lb)
	Product Dimensions	375.0 mm × 329.3 mm × 53.0 mm (14.76" × 12.96" × 2.09") (W × L × H)
	Packaging Dimensions	451.0 mm × 425.0 mm × 147.0 mm (17.75" × 16.73" × 5.79") (W × L × H)
	Operating Temperature	–10 °C to +55 °C (14 °F to +131 °F)
	Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
General	Operating Humidity	10%–93% (RH)
	Installation	Rack or desktop
	Certifications	FCC: 47 CFR FCC Part15, SubpartB, Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014